

# Noise Impact Study

## Bentinck Gravel Pit


382063 Concession 4 NDR  
West Grey, Ontario

August 17, 2023  
Project: 123-0064

Prepared for


**J.T. Excavating Ltd.**

Prepared by



Greg Dennis, P.Eng.

Reviewed by



John Emeljanow, P.Eng.



**VALCOUSTICS**

*Canada Ltd.*

## Version History

| Version # | Date            | Comments               |
|-----------|-----------------|------------------------|
| 1.0       | August 17, 2023 | Final – Issued for use |

## TABLE OF CONTENTS

|       |                                      |    |
|-------|--------------------------------------|----|
| 1.0   | INTRODUCTION.....                    | 1  |
| 1.1   | PURPOSE .....                        | 1  |
| 1.2   | SITE .....                           | 1  |
| 1.3   | NOISE SENSITIVE RECEPTORS .....      | 2  |
| 2.0   | PROGRAMME OF OPERATION.....          | 2  |
| 3.0   | ENVIRONMENTAL NOISE GUIDELINES ..... | 3  |
| 3.1   | TYPICAL OPERATIONS.....              | 3  |
| 3.1.1 | APPLICABLE NOISE LIMITS .....        | 4  |
| 3.2   | CONSTRUCTION .....                   | 4  |
| 4.0   | ASSESSMENT .....                     | 4  |
| 4.1   | ANALYSIS .....                       | 5  |
| 5.0   | RESULTS.....                         | 6  |
| 5.1.1 | Mitigation Recommendations.....      | 6  |
| 6.0   | RECOMMENDATIONS .....                | 9  |
| 7.0   | CONCLUSIONS .....                    | 9  |
| 8.0   | REFERENCES.....                      | 10 |
|       | GLOSSARY OF TERMS.....               | 11 |

### LIST OF TABLES

|         |                                           |   |
|---------|-------------------------------------------|---|
| TABLE 1 | NPC-300 MINIMUM EXCLUSION LIMITS.....     | 3 |
| TABLE 2 | EQUIPMENT SOUND LEVEL SUMMARY.....        | 5 |
| TABLE 3 | PREDICTED SOUND LEVELS – UNMITIGATED..... | 6 |
| TABLE 4 | PREDICTED SOUND LEVELS – MITIGATED.....   | 8 |
| TABLE 5 | EQUIPMENT LIMITS.....                     | 9 |

### LIST OF FIGURES

|           |                                              |
|-----------|----------------------------------------------|
| FIGURE 1  | CONTEXT PLAN                                 |
| FIGURE 2  | RECEPTOR LOCATIONS                           |
| FIGURE 3A | PREDICTED UNMITIGATED SOUND LEVELS – PHASE 2 |

.../cont'd

## **TABLE OF CONTENTS (continued)**

### **LIST OF FIGURES (continued)**

|           |                                                                                  |
|-----------|----------------------------------------------------------------------------------|
| FIGURE 3B | PREDICTED UNMITIGATED SOUND LEVELS – PHASE 4                                     |
| FIGURE 3C | PREDICTED UNMITIGATED SOUND LEVELS – PHASE 5                                     |
| FIGURE 4A | PREDICTED MITIGATED SOUND LEVELS – PHASE 2<br>(NO VACANT NOISE SENSITIVE LOTS)   |
| FIGURE 4B | PREDICTED MITIGATED SOUND LEVELS – PHASE 4<br>(NO VACANT NOISE SENSITIVE LOTS)   |
| FIGURE 4C | PREDICTED MITIGATED SOUND LEVELS – PHASE 5<br>(NO VACANT NOISE SENSITIVE LOTS)   |
| FIGURE 5A | PREDICTED MITIGATED SOUND LEVELS – PHASE 2<br>(WITH VACANT NOISE SENSITIVE LOTS) |
| FIGURE 5B | PREDICTED MITIGATED SOUND LEVELS – PHASE 4<br>(WITH VACANT NOISE SENSITIVE LOTS) |
| FIGURE 5C | PREDICTED MITIGATED SOUND LEVELS – PHASE 5<br>(WITH VACANT NOISE SENSITIVE LOTS) |

### **LIST OF APPENDICES**

|            |                                      |
|------------|--------------------------------------|
| APPENDIX A | OPERATIONS PLAN                      |
| APPENDIX B | STATIONARY NOISE CALCULATION DETAILS |
| APPENDIX C | SAMPLE PRODUCT INFORMATION           |
| APPENDIX D | CURRICULUM VITAE                     |

# Noise Impact Study

## Bentinck Gravel Pit

382063 Concession 4 NDR  
West Grey, Ontario

### 1.0 INTRODUCTION

#### 1.1 PURPOSE

Valcoustics Canada Ltd. (VCL) was retained to prepare a Noise Impact Study for the proposed gravel pit located at 382063 Concession 4 NDR in the Municipality of West Grey, Ontario. The purpose of the noise impact analysis is to:

- Identify the potential noise sources;
- Predict the resulting sound levels at noise sensitive receptors due to the operation of the pit; and
- Recommend mitigation measures to meet the Ministry of the Environment, Conservation and Parks (MECP) environmental noise guideline limits, where required.

#### 1.2 SITE

The proposed gravel pit is located at 382063 Concession 4 NDR, approximately 1.2 km west of Mulock Road in the Municipality of West Grey, Ontario.

The site is surrounded by:

- Vacant wooded land, with the Saugeen River and Camp McGovern beyond, to the north;
- Agricultural land, with single-family dwellings and the Saugeen Springs RV Park beyond, to the east;
- Concession 4 NDR, with agricultural land and single-family dwellings beyond, to the south; and
- Agricultural land, with single-family dwellings and Allan Park Road beyond, to the west.

The site is currently being used for agricultural purposes. There is a vacant building on the property that will be removed as part of this project.

A Context Plan is provided as Figure 1. The Operations Plan is included as Appendix A.

### 1.3 NOISE SENSITIVE RECEPTORS

A noise sensitive land use is defined as the property of a person that accommodates a dwelling (including a campsite), a building used for a noise-sensitive commercial purpose or a building used for a noise-sensitive institutional purpose. A noise sensitive commercial purpose building is used for commercial purposes and includes one or more habitable rooms used as sleeping facilities such as a hotel or motel. A noise sensitive institutional purpose building means a building used for an institutional purpose, including an educational facility, a day nursery, a hospital, a health care facility, a shelter for emergency housing, a community centre, a place of worship, a detention centre, etc.

A noise sensitive zoned vacant lot is defined as a property that has been zoned to permit a noise sensitive land use, which is currently vacant or has an existing land use that is not noise sensitive.

The noise study has assessed the noise impacts at the closest noise sensitive receptors surrounding the proposed aggregate pit. This includes the existing single-family dwellings to the east, south and west, Camp McGovern to the north (which operates on both sides of the Saugeen River and includes overnight campsites/cabins) and the vacant noise sensitive lands to the east and west of the site that are zoned Agricultural (which permit a single-family dwelling).

See Figure 2 for the noise sensitive receptor locations that were analysed in detail. Other existing noise sensitive land uses and vacant noise sensitive lots are further from the site and benefit from the acoustical screening provided by the intervening woods and will receive lower sound levels from the proposed pit operations. Thus, compliance with the MECP noise guideline limits at the closest noise sensitive receptors should inherently result in compliance with the MECP noise guideline limits at all the noise sensitive receptors.

## 2.0 PROGRAMME OF OPERATION

Initially, trees, overburden and topsoil will be removed to expose the material for extraction. Tree, overburden and topsoil removal should be a relatively short-lived activity that will be done progressively on an as needed basis. The overburden and topsoil will be stored on site and later used for rehabilitation.

Aggregate extraction will occur in 5 phases. It will commence in the north half of the site, proceeding northward in Phases 1 and 2. A portion of Phase 1 (Phase 1a) will be used as a processing area. Extraction will then proceed southward in Phases 3 to 5. The site is bisected by a ponding area that will remain unexcavated.

The equipment to be used on the site as part of the aggregate extraction and processing operation is a processing plant (crusher, screen and stacker(s)), front end loader and shipping trucks.

The truck traffic generated from the aggregate pit was obtained from the traffic study prepared for the project (Reference 9). During the worst-case (busiest) hour, 5 loads of aggregate could be shipped. This means 5 trucks would enter the site, be loaded with aggregate, and then leave the site in the same hour for a total of 10 truck pass bys.

All extraction, processing and shipping activities will occur at the bottom elevation of the extraction face, with a lift height of 5 m.

### 3.0 ENVIRONMENTAL NOISE GUIDELINES

The applicable noise guideline limits for the proposed pit operation are in MECP Publication NPC-300, “*Environmental Noise Guideline, Stationary and Transportation Sources - Approval and Planning*”.

As per NPC-300, an aggregate extraction facility is a stationary noise source. Note that the MECP terminology “stationary source” refers to the site as a whole, including the composite effect of all of the individual sound sources, even if they can actually move around the site. Source, as referred to above, means the site (operation) as a whole.

The MECP noise guidelines require that the noise assessment determine the “predictable worst case” impacts. Thus, the assessment needs to evaluate and recommend mitigation for the largest possible excess over the noise guideline limits based on the proposed operations in any operating hour.

#### 3.1 TYPICAL OPERATIONS

Noise sensitive receptors in this case are existing residential uses to the east, south and west, Camp McGovern to the north and the vacant noise sensitive zoned lots to the east and west. All receptors were modelled at a 4.5 m height, representing the upper floor of a two-storey dwelling/cabin. The receptors are considered to be in a Class 3 area. A Class 3 area has a low background noise level during the daytime, evening and nighttime, defined by the natural environment and infrequent human activities. See Glossary of Terms for Definitions of Class 1, Class 2 and Class 3 areas.

MECP Publication NPC-300 states that the guideline limits are the higher of the ambient sound level, due to road traffic noise, or the minimum exclusion limits listed in Table 1. Sound levels are assessed using one-hour  $L_{eq}$  (dBA), the energy equivalent continuous sound level. The sound level limits apply at the exterior of a noise sensitive Plane of Window (POW) at all times or at an Outdoor Point of Reception (OPOR) in the daytime and evening only. There are no sound level limits for OPORs at night. An OPOR is any point within 30 m of a residential dwelling or campsite provided it is on the same property and is amenable for use.

**TABLE 1 NPC-300 MINIMUM EXCLUSION LIMITS**

| Time of Day                   | Class 3 Area    |                            |
|-------------------------------|-----------------|----------------------------|
|                               | Plane of Window | Outdoor Point of Reception |
| Daytime (0700 - 1900 hours)   | 45              | 45                         |
| Evening (1900 - 2300 hours)   | 40              | 40                         |
| Nighttime (2300 - 0700 hours) | 40              | -                          |

### 3.1.1 APPLICABLE NOISE LIMITS

The Class 3 exclusion limits were used as the guideline limits for all receptors.

Tables 3 and 4 and Figures 3A, 3B, 3C, 4A, 4B, 4C, 5A, 5B and 5C show the applicable guideline limits at each receptor.

### 3.2 CONSTRUCTION

The MECP defines construction as “a temporary activity which includes erection, alteration, repair, dismantling, demolition, structural maintenance, painting, moving, land clearing, earth moving, grading, excavating, the laying of pipe and conduit whether above or below ground level, street and highway building, concreting, equipment installation and alteration and the structural installation of construction components and materials in any form or for any purpose, and includes any work in connection therewith”. As stated in section (5) of the stationary source definition in MECP Publication NPC-300, temporary construction activities are not considered stationary sources where MECP approvals are required (Part B of NPC-300), such as an ECA or EASR, and where land use approvals are required (Part C of NPC-300).

Temporary construction activities at the pit include site preparation (clearing of trees and removal of topsoil/overburden, construction of access roads and infrastructure such as scale and offices, construction of noise mitigation features such as perimeter berms, etc.) and rehabilitation (removal of buildings constructed on site, dismantling of noise mitigation features, earth moving, etc.). These activities are not chronic and are excluded from the stationary noise source assessment as outlined above. However, equipment used for construction must comply with the sound emission limits outlined in MECP Publication NPC-115, “Construction Equipment”.

## 4.0 ASSESSMENT

The aggregate pit operation is a dynamic, continually changing process that moves across the site. The site operations consist of various components:

- site preparation, including the removal of trees and the stripping of topsoil and overburden;
- aggregate extraction;
- the transporting and processing of aggregate;
- rehabilitation; and
- other miscellaneous construction activities.

It is not possible to determine the duration of the construction activities. This will depend on several factors including the amount of equipment that is used, the conditions encountered on-site such as the depth of overburden, the market demand which will determine the area of site preparation required, how often site preparation is to be done (i.e., annually, every other year, etc.) and the area that is ready for rehabilitation. However, it is expected that construction will be done on an as needed basis over the life of the pit. Thus, the assessment outlined below excludes construction (which includes site preparation and rehabilitation) in accordance with the MECP noise guidelines.

The aggregate pit is proposed to operate from 0700 to 1900 hours, Monday to Friday, and 0900 to 1400 hours on Saturdays.

Worst-case operations at the pit are:

- 1 front-end loader operating at the bottom of the working face, loading haul trucks to bring material to the processing area. Up to 5 loads of aggregate could be hauled to the processing area in an hour;
- 1 front end loader operating at the processing area, loading the shipping trucks from stockpiles created by the processing plant. Up to 5 loads of aggregate could be shipped off site in an hour.
- Crushing and screening plants and associated equipment (i.e., conveyors, stacker, etc.) operating continuously in the processing area.

The equipment sound emission levels used in our analysis are listed in Table 2. The sound levels for the front-end loader and processing plant were determined from measurements done at other similar operating facilities. The sound level data for the shipping trucks was obtained from Reference 9.

**TABLE 2 EQUIPMENT SOUND LEVEL SUMMARY**

| Type             | Sound Emission Level @ 15 m (dBA) |
|------------------|-----------------------------------|
| Front End Loader | 76                                |
| Processing Plant | 90                                |
| Shipping Trucks  | 75                                |

To ensure the off-site sound levels do not exceed those predicted herein, sound emission levels from equipment to be used on site should be measured to ensure they do not exceed the levels outlined in Table 2 or they have appropriate portable Certificates of Approval (C's of A) or Environmental Compliance Approvals (ECA's).

#### 4.1 ANALYSIS

To assess the noise impact at the noise sensitive receptor locations, a 3-D acoustical model of the proposed operations was developed using the CadnaA V2023 MR 1 environmental noise modelling software. The model uses the prediction algorithms outlined in International Standards Organization (ISO) Standard 9613-2:1996, "*Acoustics – Attenuation of sound during propagation outdoors – Part 2: General method of calculation*". The modelling technique is an approach that is acceptable to the MECP.

- Grading for the site was obtained from the Operations Plan (Appendix A). Grading for the surrounding area was obtained from the Grey County interactive map.
- Wooded lots were modelled as foliage with a height of 12 m.
- Hard ground (G=0) was used for the pit floor, river and paved areas/roadways. Soft ground (G=1) was used elsewhere.

## 5.0 RESULTS

The predicted unmitigated sound levels for each receptor are shown in Table 3 for the worst-case operations at the pit. The table shows the highest sound levels predicted at each receptor. Detailed analyses were done to determine the extraction location where the highest sound levels would occur for each receptor.

Figures 3A, 3B and 3C show the predicted sound levels at each receptor during the worst-case operations, which occur during Phases 2, 4 and 5, respectively. As shown, excess sound levels are predicted at the existing single-family dwelling to the west (R5 to R7), Camp McGovern to the north (R8) and the vacant noise sensitive zoned lots to the east and west (R10 and R11). Thus, mitigation is required for the site.

Appendix C contains additional calculation details.

**TABLE 3      PREDICTED SOUND LEVELS – UNMITIGATED**

| Receptor | Description                      | Daytime (0700-1900 hours)                         |                                     |
|----------|----------------------------------|---------------------------------------------------|-------------------------------------|
|          |                                  | Predicted Sound Level Worst-case Operations (dBA) | Guideline Limit(dBA) <sup>(4)</sup> |
| R1       | Existing Single-Family Dwelling  | 35 <sup>(1)</sup>                                 | 45                                  |
| R2       | Existing Single-Family Dwelling  | 41 <sup>(2)</sup>                                 | 45                                  |
| R3       | Existing Single-Family Dwelling  | 44 <sup>(2)</sup>                                 | 45                                  |
| R4       | Existing Single-Family Dwelling  | 45 <sup>(2)</sup>                                 | 45                                  |
| R5       | Existing Single-Family Dwelling  | 52 <sup>(3)</sup>                                 | 45                                  |
| R6       | Existing Single-Family Dwelling  | 49 <sup>(3)</sup>                                 | 45                                  |
| R7       | Existing Single-Family Dwelling  | 47 <sup>(3)</sup>                                 | 45                                  |
| R8       | Camp McGovern                    | 46 <sup>(3)</sup>                                 | 45                                  |
| R9       | Camp McGovern                    | 43 <sup>(3)</sup>                                 | 45                                  |
| R10      | Vacant Noise Sensitive Zoned Lot | 61 <sup>(1)</sup>                                 | 45                                  |
| R11      | Vacant Noise Sensitive Zoned Lot | 53 <sup>(2)</sup>                                 | 45                                  |

**Notes:**

- (1) See Figure 3A.
- (2) See Figure 3B.
- (3) See Figure 3C.
- (4) Class 3 exclusion limits

### 5.1.1 Mitigation Recommendations

The largest excess above the MECP noise guideline limit at an existing dwelling is 7 dBA and occurs at receptor R5.

The largest excess above the limits at a vacant noise sensitive zoned lot is 16 dBA and occurs at R10, the agricultural land directly west of the subject site.

To mitigate the noise impact from the gravel pit at existing noise sensitive uses:

- A 2.0 m high sound barrier is recommended at the north end of Phases 1 and 2. This barrier is required prior to the start of any work in Phases 1 or 2.
- A 4.0 m high sound barrier is recommended along the west side of Phase 2, returning east along the south extent. This barrier is required prior to the start of any work in Phases 1 or 2.
- A 4.0 m high sound barrier is recommended along the west side of Phase 5, extending east approximately 30 m at the north end. This barrier is required prior to the start of any work in Phases 3 to 5.

Figures 4A to 4C show the sound barriers.

Mitigating the noise levels at the vacant noise sensitive lots is only required if a noise sensitive use (such as a residential dwelling) is built on the lots. To mitigate the sound levels at the vacant noise sensitive lots:

- A localized sound barrier up to 10 m in height would be required around the west side of the processing area;
- A sound barrier up to 17 m in height would be required along the east side of Phases 3 and 4; and
- The 4.0 m high sound barrier along the west and south sides of Phase 2 (as noted above) would need to increase to 5.0 m in height.

Figures 5A to 5C show the sound barriers. The barriers would be required prior to the start of any work occurring on the site, provided a noise sensitive use has been built at the adjacent lots.

Table 4 shows the predicted mitigated sound levels during the worst-case operations at the pit.

**TABLE 4 PREDICTED SOUND LEVELS – MITIGATED**

| Receptor | Description                     | Daytime (0700-1900 hours)                        |                                      |
|----------|---------------------------------|--------------------------------------------------|--------------------------------------|
|          |                                 | Predicted Mitigated Sound Level Worst-case (dBA) | Guideline Limit (dBA) <sup>(3)</sup> |
| R1       | Existing Single-Family Dwelling | 35 <sup>(1)</sup>                                | 45                                   |
| R2       | Existing Single-Family Dwelling | 41 <sup>(2)</sup>                                | 45                                   |
| R3       | Existing Single-Family Dwelling | 44 <sup>(2)</sup>                                | 45                                   |
| R4       | Existing Single-Family Dwelling | 45 <sup>(2)</sup>                                | 45                                   |
| R5       | Existing Single-Family Dwelling | 45 <sup>(3)</sup>                                | 45                                   |
| R6       | Existing Single-Family Dwelling | 42 <sup>(3)</sup>                                | 45                                   |
| R7       | Existing Single-Family Dwelling | 42 <sup>(1)</sup>                                | 45                                   |
| R8       | Camp McGovern                   | 40 <sup>(1)</sup>                                | 45                                   |
| R9       | Camp McGovern                   | 43 <sup>(1)</sup>                                | 45                                   |
| R10      | Noise Sensitive Vacant Lot      | 45 <sup>(4)</sup>                                | 45                                   |
| R11      | Noise Sensitive Vacant Lot      | 45 <sup>(4)</sup>                                | 45                                   |

Notes:

- (1) See Figure 4A.
- (2) See Figure 4B.
- (3) See Figure 4C.
- (4) See Figure 5A.
- (5) Class 3 exclusion limits

Sound barriers must have a minimum surface density of 20 kg/m<sup>2</sup> and be of solid construction. Earth berms, wood, concrete, masonry, composites or other material meeting the above specification (such as fence atop a berm) can be used.

The following are also suggested as best management practices:

- Back-up beepers are often a source of complaint even though their short duration does not contribute to the hourly sound level from the site operations. To reduce off-site noise impacts, where possible, alternative technologies (such as broadband alarms) should be used on the equipment operating at the site provided they meet the safety requirements of the operator. Typical product information is included as Appendix C; and
- Internal haul routes should be designed to minimize the need for reversing to minimize the use of back-up alarms.

Any changes to the noise mitigation and/or equipment should be reviewed by a qualified acoustical consultant to ensure sound emissions from the facility will remain in compliance with the MECP noise guideline limits.

## 6.0 RECOMMENDATIONS

These noise mitigation measures are recommended for the gravel pit and should be included on the Site Plans:

- All operations at the pit should only be done during the daytime (i.e., 0700 to 1900 hours) period.
- The sound emission level for all pieces of equipment used for construction activities including site preparation and rehabilitation must comply with the limits outlined in MECP Publication NPC-115, "Construction Equipment".
- Construction activities should only be done during the daytime (0700 to 1900 hours) Monday to Friday and should not be done on weekends or statutory holidays.
- Alternative technologies to back-up beepers (such as broadband alarms) should be used on the equipment operating at the site. Internal haul routes should be designed to minimize the need for reversing to reduce the use of back-up alarms.
- The amount and sound emission levels from the equipment operating on site must not exceed those outlined in Table 5.

**TABLE 5 EQUIPMENT LIMITS**

| Type             | Maximum Number | Maximum Sound Emission Level (dBA) |
|------------------|----------------|------------------------------------|
| Front End Loader | 1              | 76 @ 15 m                          |
| Processing Plant | 1              | 90 @ 15 m                          |
| Shipping Trucks  | 10 per hour    | 75 @ 15 m                          |

- To ensure noise emissions comply with the recommendations of this report, sound emission levels from equipment to be used on site should be measured to ensure they do not exceed the levels outlined herein (Table 5). For equipment brought to the site on an as-needed basis, they may have appropriate C of A's or ECA's implying that measurements would have been completed prior to approval.
- An off-site noise audit should be completed within 6 months of the start of extraction while processing operations are being done on the site to confirm the MECP noise guideline limits are not exceeded. The audit must be done by a qualified acoustical engineer.
- If alternate noise mitigation measures are to be implemented, they be reviewed and approved by a qualified acoustical consultant to ensure the MECP noise guideline limits will not be exceeded.

## 7.0 CONCLUSIONS

With the appropriate implementation of the mitigation measures outlined herein, the sound levels from the worst-case operations on the site will be in compliance with MECP noise guideline limits.

As the operation moves over the site, sound levels at the off-site receptors will vary. The noise analysis has been approached on the basis of determining worst case conditions to ensure that the data presented does not under-predict the potential off-site sound levels.


## 8.0 REFERENCES

1. "Model Municipal Noise Control By-Law", Final Report, Ontario Ministry of the Environment, August 1978.
2. "Noise Emission Levels for Vehicles in Ontario", Ontario Ministry of Transportation and Communications, November 1985, H05-85-02.
3. "Stationary and Transportation Sources - Approval and Planning", Ontario Ministry of the Environment, Publication NPC-300, October 2013.
4. PC STAMSON 5.04, "Computer Program for Road Traffic Noise Assessment", Ontario Ministry of the Environment.
5. "Acoustics – Attenuation of Sound During Propagation Outdoors – Part 2: General Method of Calculation", ISO 9613-2, December 15, 1996.
6. CadnaA, version 2022 MR 2, DataKustik GmbH.
7. "Publication NPC-115 Construction Equipment", Ontario Ministry of the Environment, 1981.
8. "FHWA Traffic Noise Model Technical Manual", U.S. Department of Transportation, Federal Highway Administration, February 1998
9. "Transportation Study: Proposed Burnstead Pit, Concession 4 NDR, Grey County" prepared by Paradigm Transportation Solutions, dated December 16, 2021.


GD\JE\mv  
J:\2023\1230064\000\Reports\Bentinck Gravel Pit - Noise V1\_0.docx




|                                                                                    |                           |  |                      |                    |
|------------------------------------------------------------------------------------|---------------------------|--|----------------------|--------------------|
|  | Title                     |  | Date                 | Figure<br><b>1</b> |
|                                                                                    | <b>Context Plan</b>       |  | <b>June 22, 2023</b> |                    |
|                                                                                    | Project Name              |  | Project No.          |                    |
|                                                                                    | <b>Bentick Gravel Pit</b> |  | <b>123-0064.000</b>  |                    |

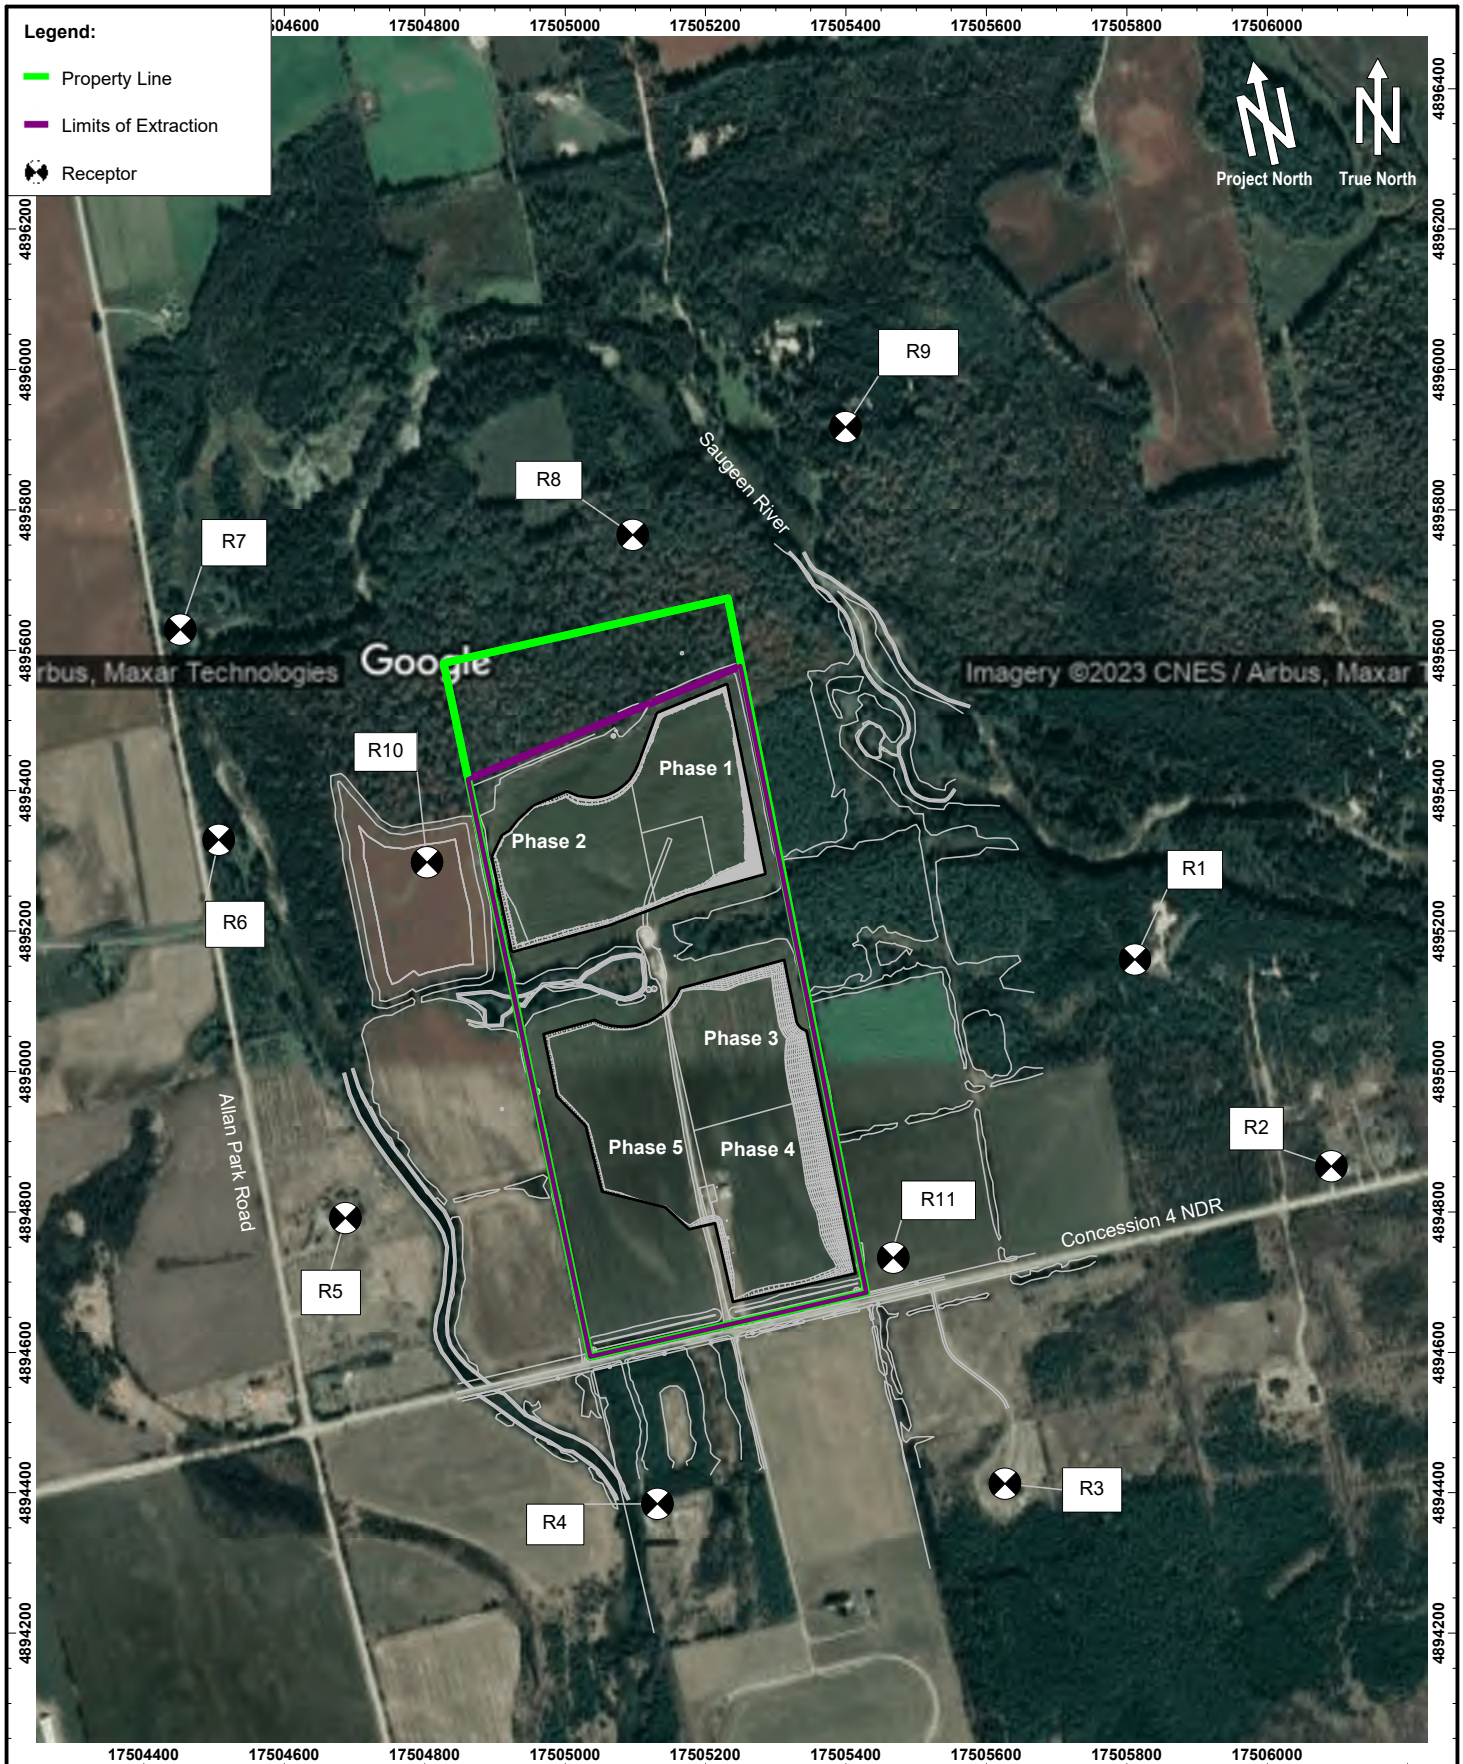


|                                                                                    |                    |              |               |        |
|------------------------------------------------------------------------------------|--------------------|--------------|---------------|--------|
|  | Title              |              | Date          | Figure |
|                                                                                    | Receptor Locations |              | June 22, 2023 |        |
|                                                                                    | Project Name       |              | Project No.   | 2      |
| Bentick Gravel Pit                                                                 |                    | 123-0064.000 |               |        |

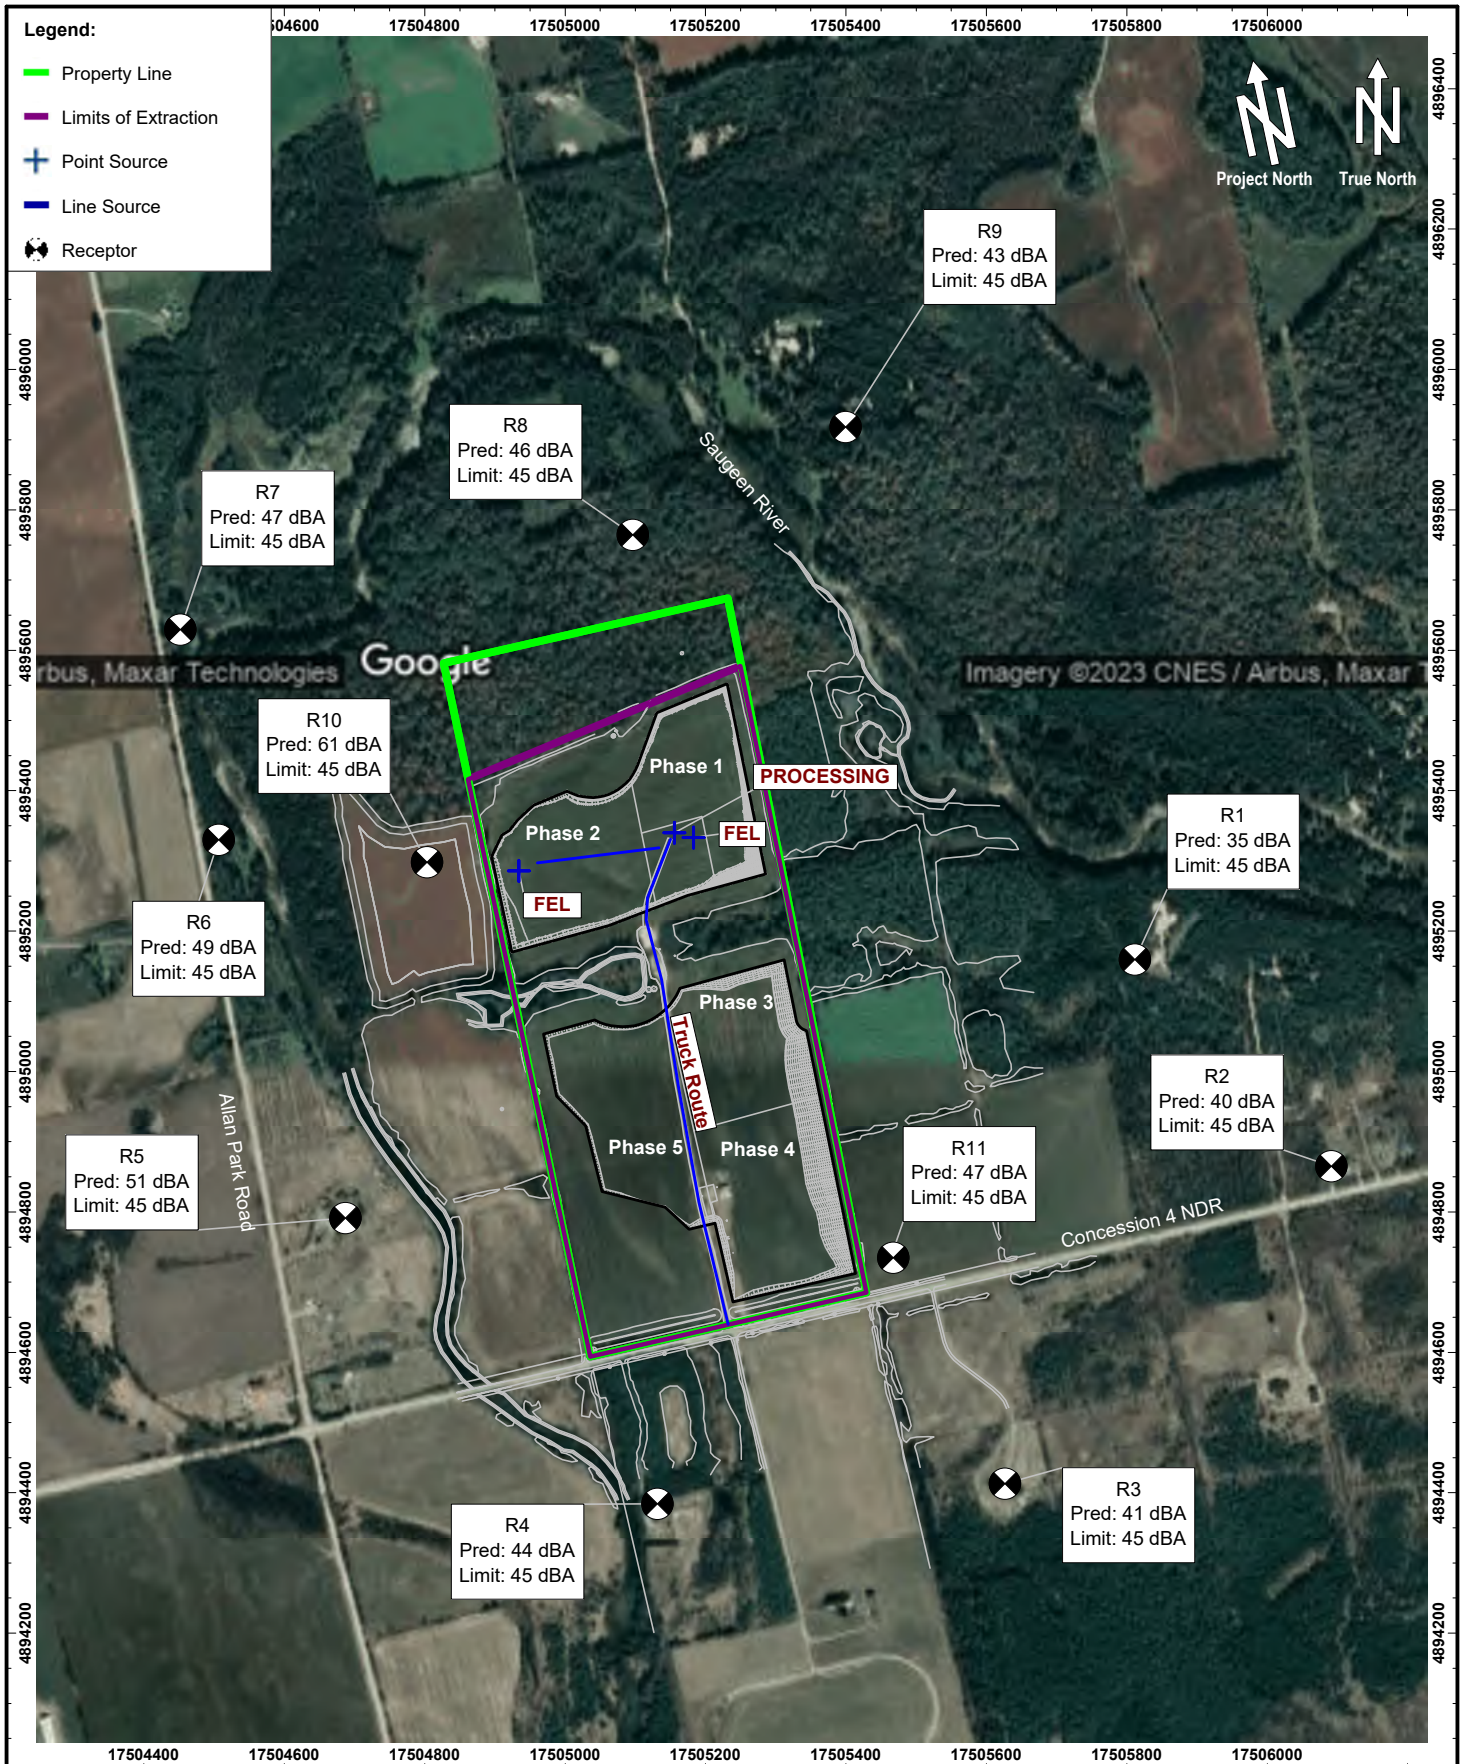


|  |                                                    |  |               |        |
|--|----------------------------------------------------|--|---------------|--------|
|  | Title                                              |  | Date          | Figure |
|  | Predicted Unmitigated Sound Levels - Phase 2 (dBA) |  | June 22, 2023 |        |
|  | Project Name                                       |  | Project No.   | 3A     |
|  | Bentick Gravel Pit                                 |  | 123-0064.000  |        |

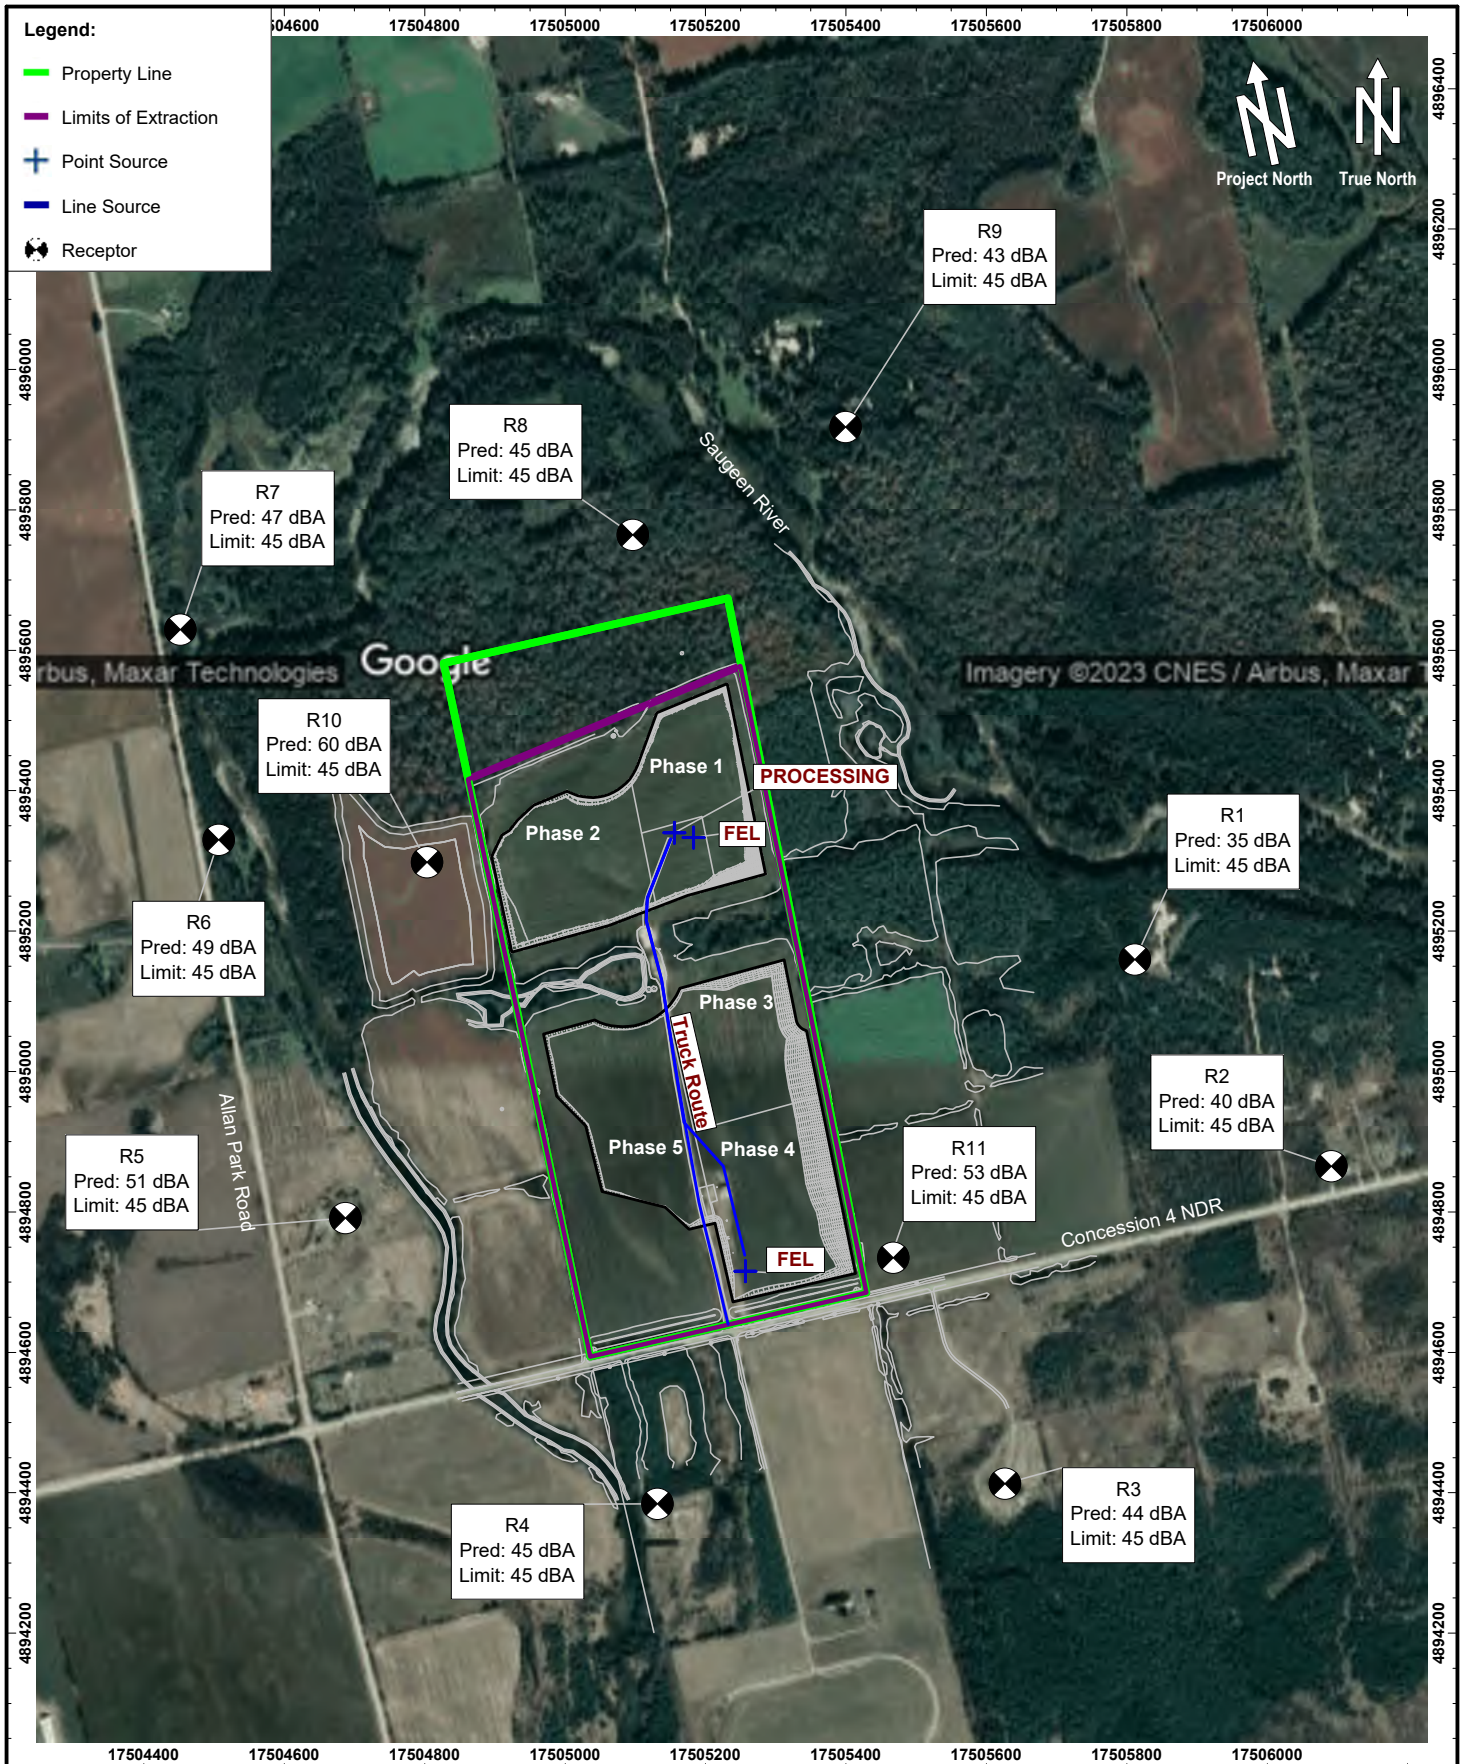


|                                                                                    |                                                    |  |               |        |
|------------------------------------------------------------------------------------|----------------------------------------------------|--|---------------|--------|
|  | Title                                              |  | Date          | Figure |
|                                                                                    | Predicted Unmitigated Sound Levels - Phase 4 (dBA) |  | June 22, 2023 | 3B     |
|                                                                                    | Project Name                                       |  | Project No.   |        |
|                                                                                    | Bentick Gravel Pit                                 |  | 123-0064.000  |        |

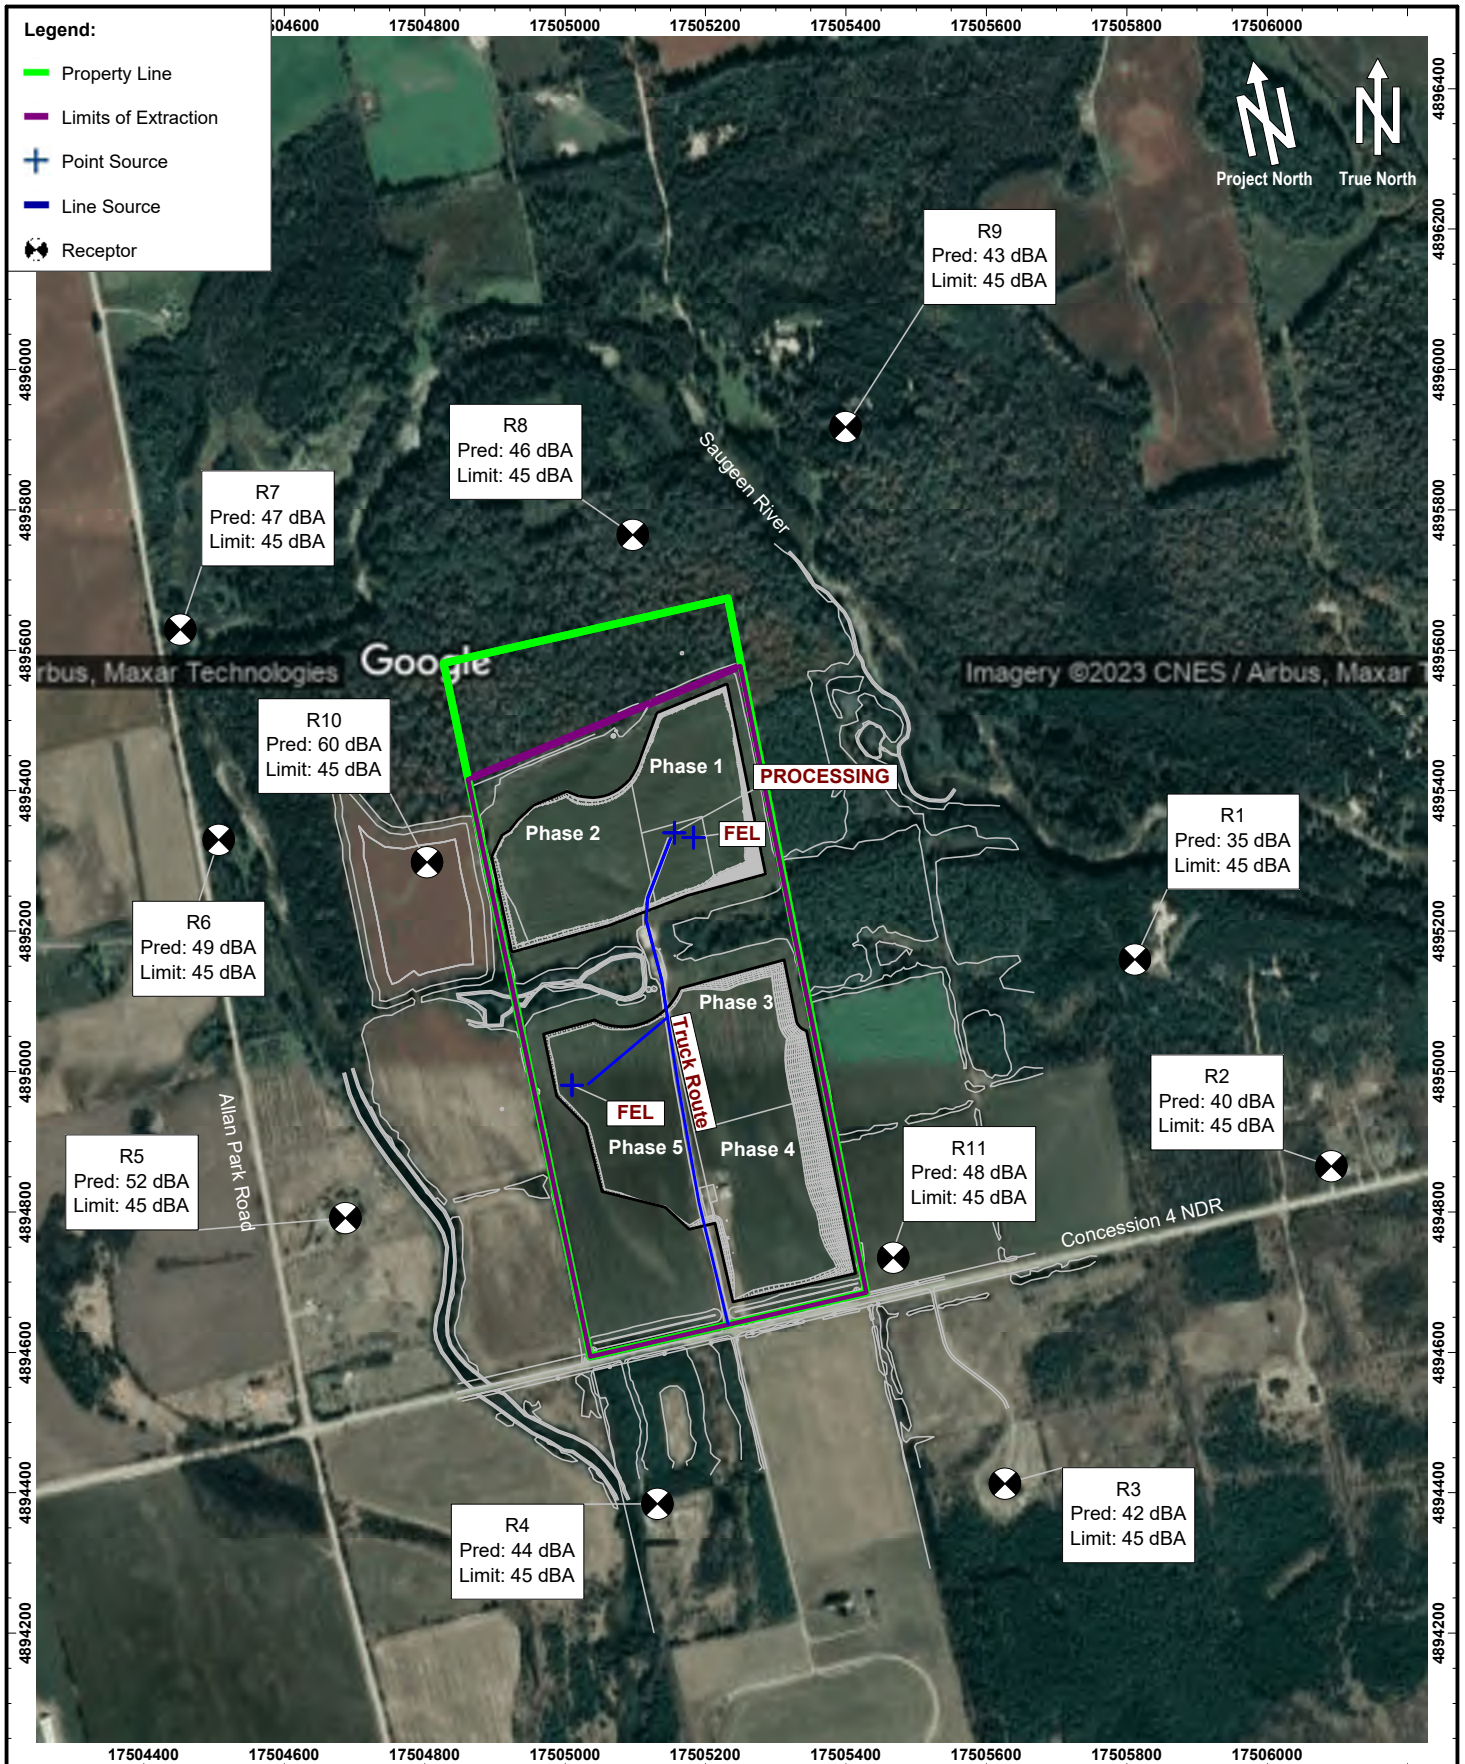


|                                                                                    |                                                    |  |               |        |
|------------------------------------------------------------------------------------|----------------------------------------------------|--|---------------|--------|
|  | Title                                              |  | Date          | Figure |
|                                                                                    | Predicted Unmitigated Sound Levels - Phase 5 (dBA) |  | June 22, 2023 | 3C     |
|                                                                                    | Project Name                                       |  | Project No.   |        |
|                                                                                    | Bentick Gravel Pit                                 |  | 123-0064.000  |        |

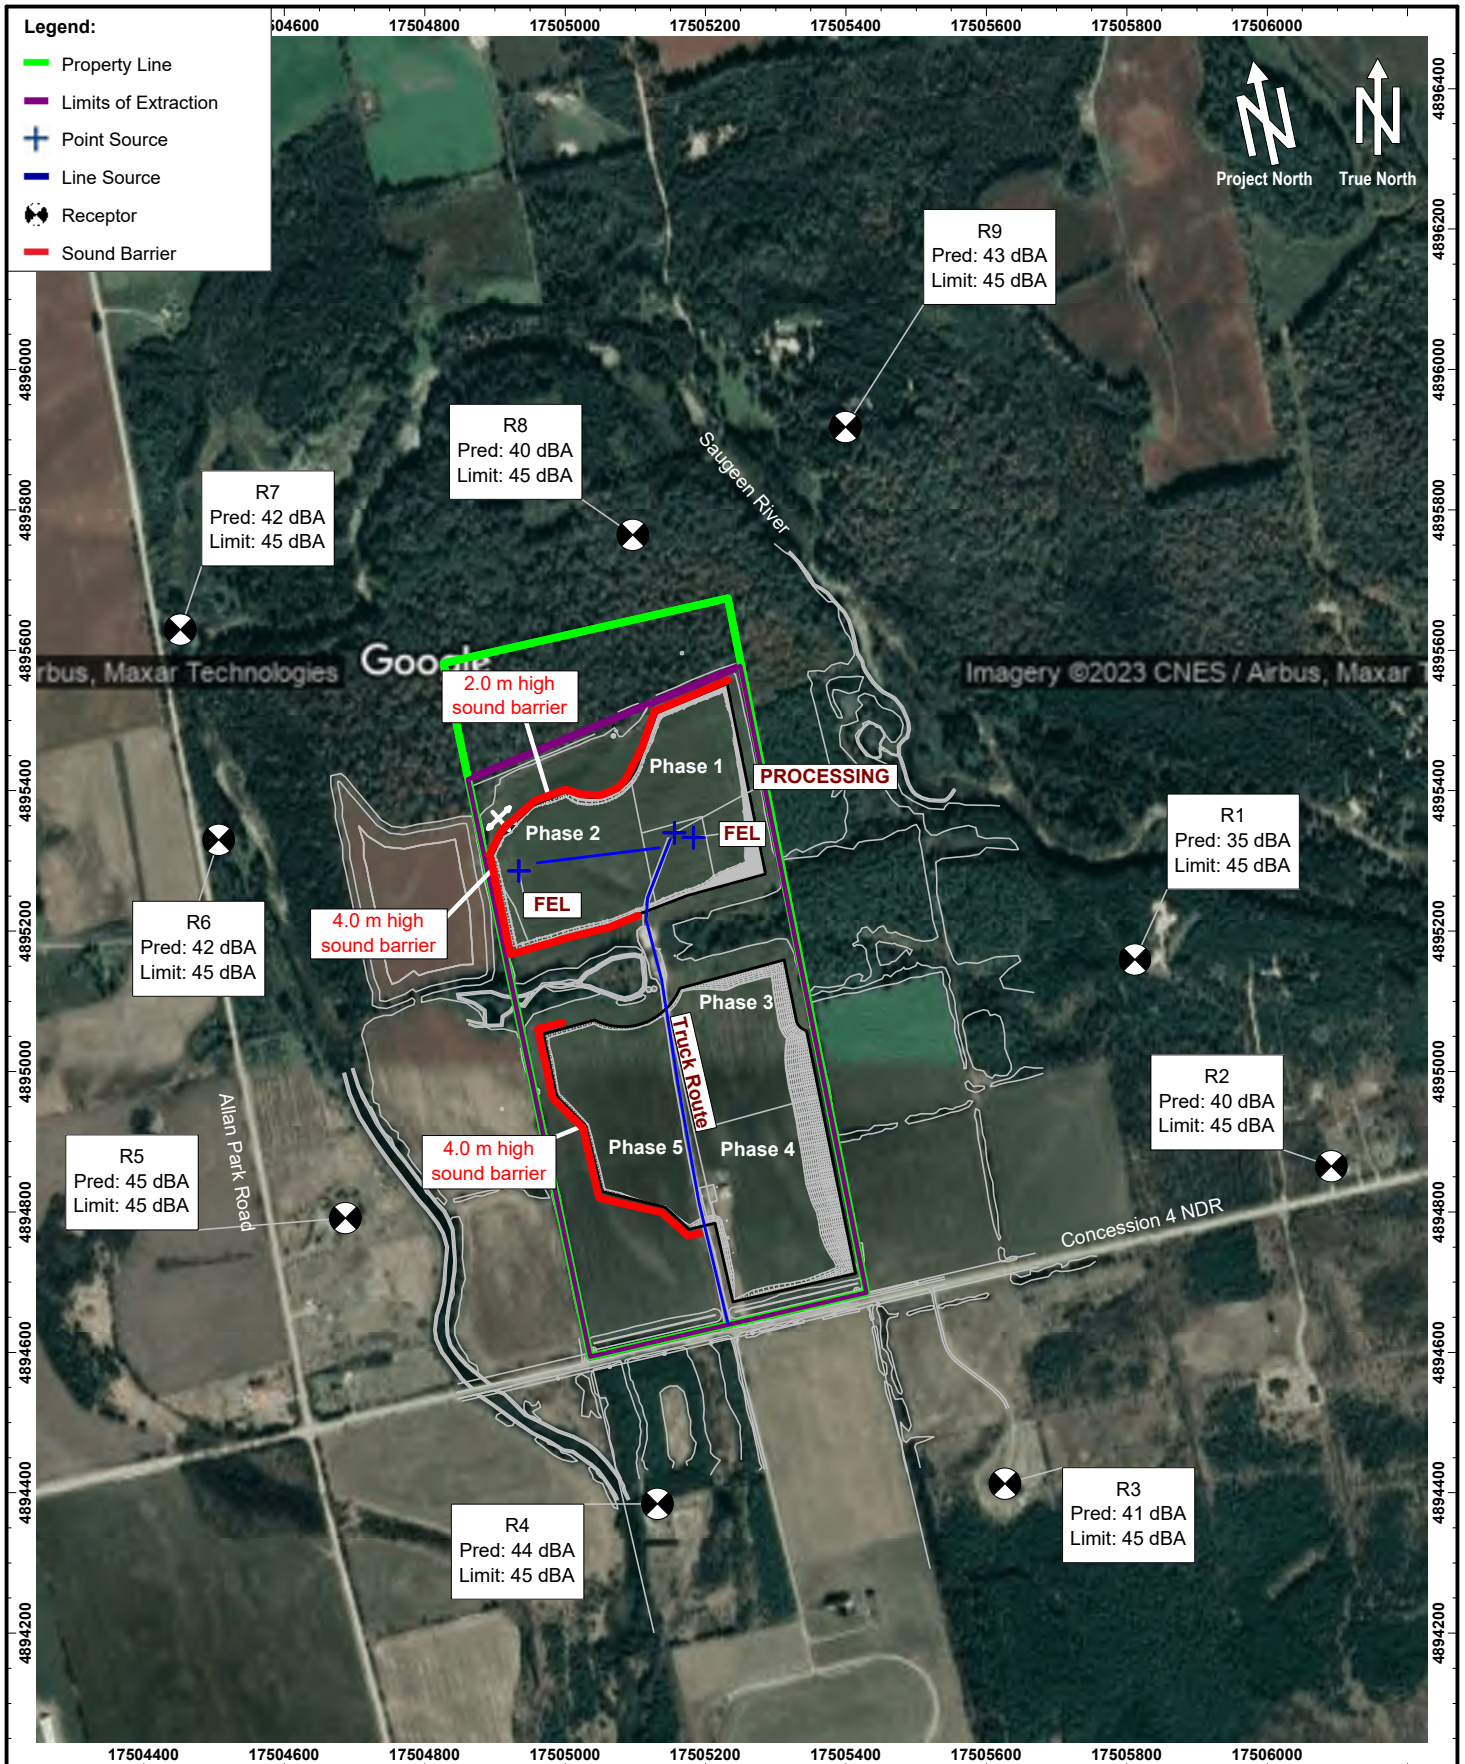


|                                                                                    |                                                                                                   |  |                                    |                                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--|------------------------------------|--------------------------------|
|  | <b>Title</b><br>Predicted Mitigated Sound Levels - Phase 2 (No Vacant Noise Sensitive Lots) (dBA) |  | <b>Date</b><br>June 22, 2023       | <b>Figure</b><br><div>4A</div> |
|                                                                                    | <b>Project Name</b><br>Bentick Gravel Pit                                                         |  | <b>Project No.</b><br>123-0064.000 |                                |

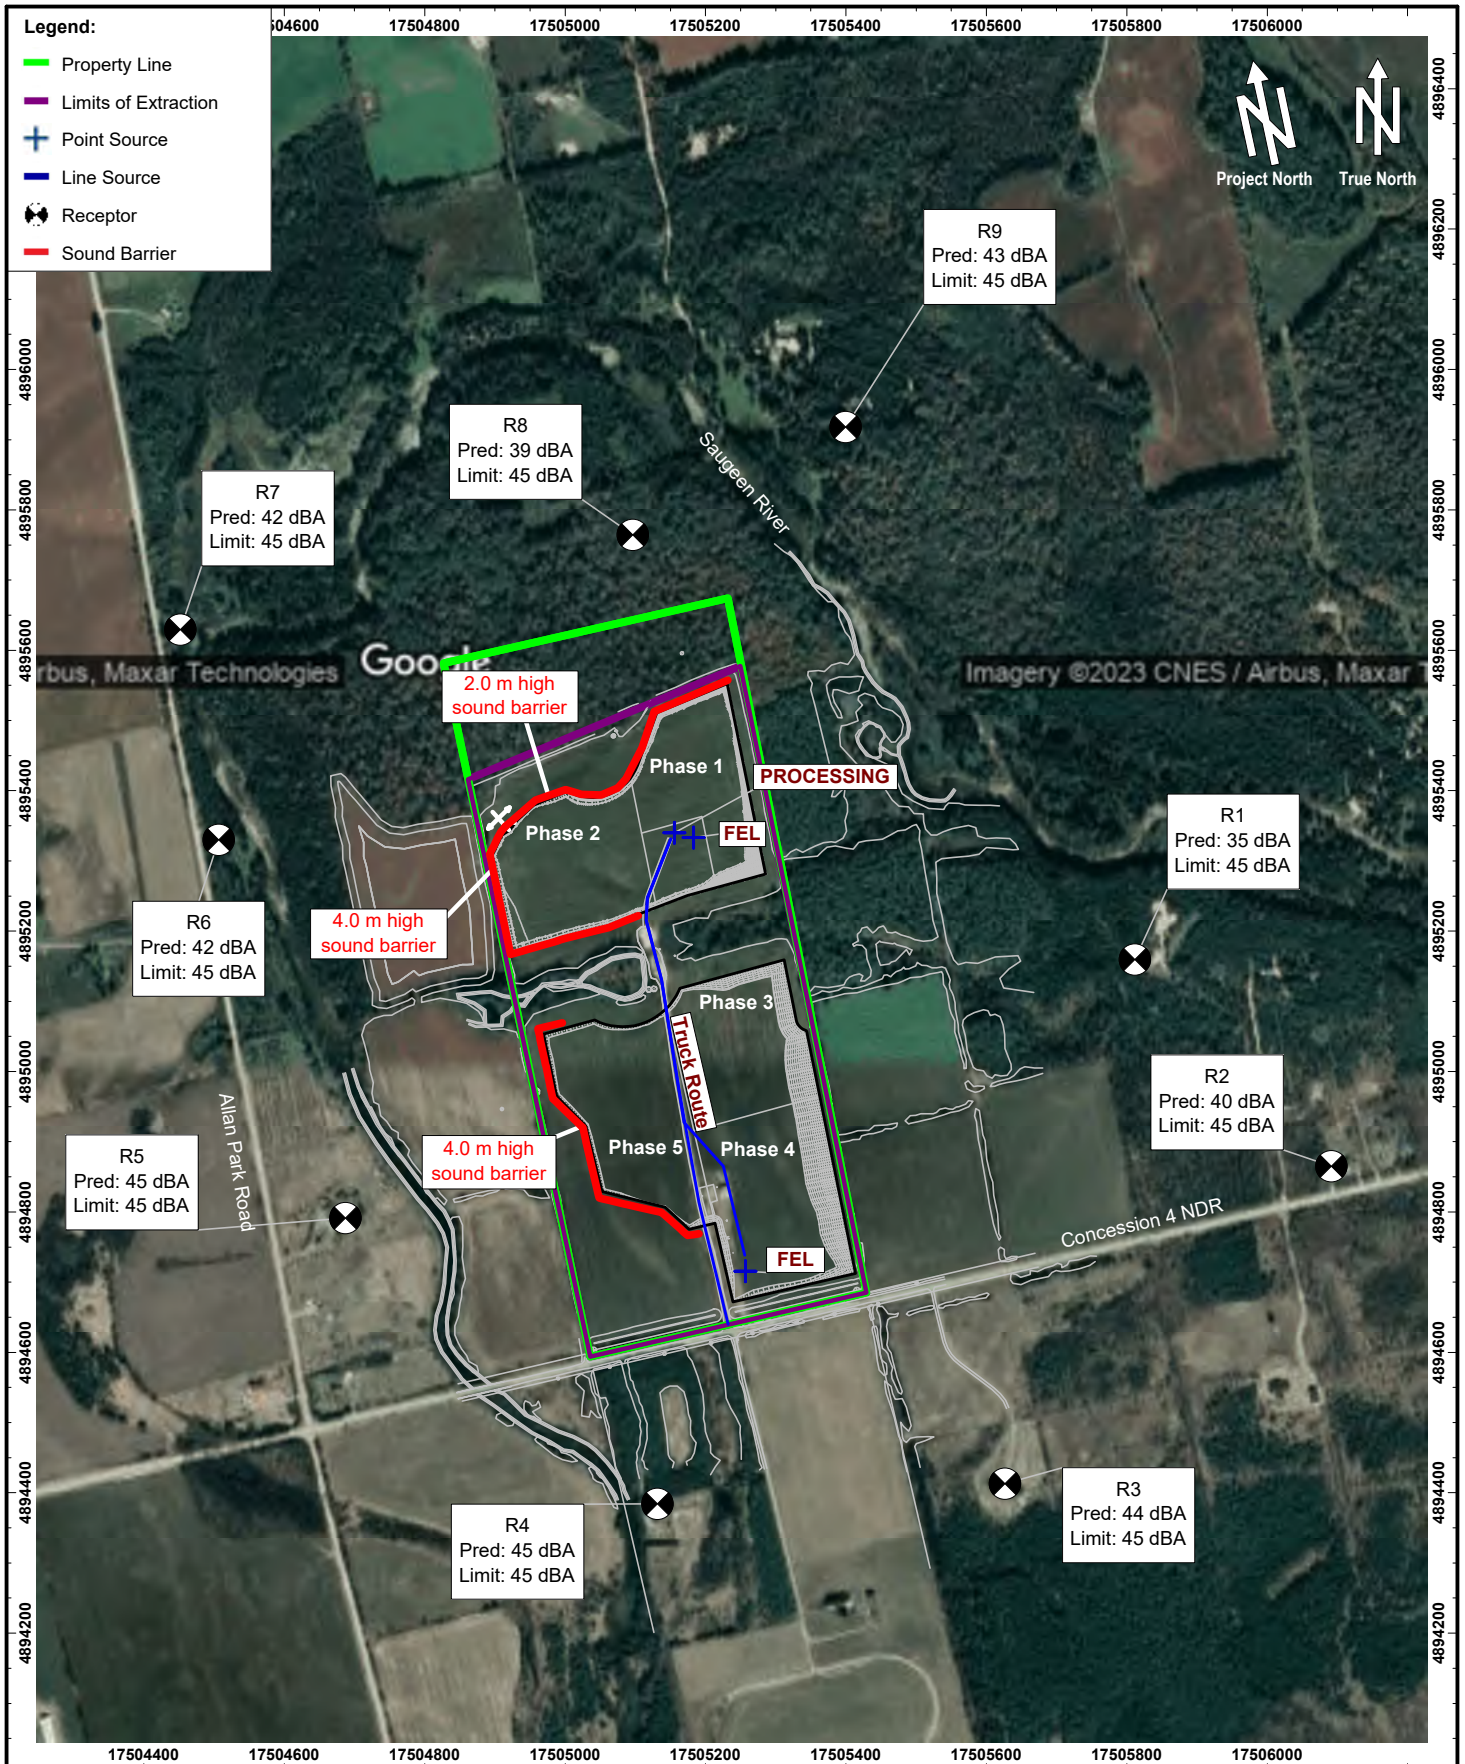


|  |                                                                                   |  |               |        |
|--|-----------------------------------------------------------------------------------|--|---------------|--------|
|  | Title                                                                             |  | Date          | Figure |
|  | Predicted Mitigated Sound Levels - Phase 4 (No Vacant Noise Sensitive Lots) (dBA) |  | June 22, 2023 |        |
|  | Project Name                                                                      |  | Project No.   | 4B     |
|  | Bentick Gravel Pit                                                                |  | 123-0064.000  |        |

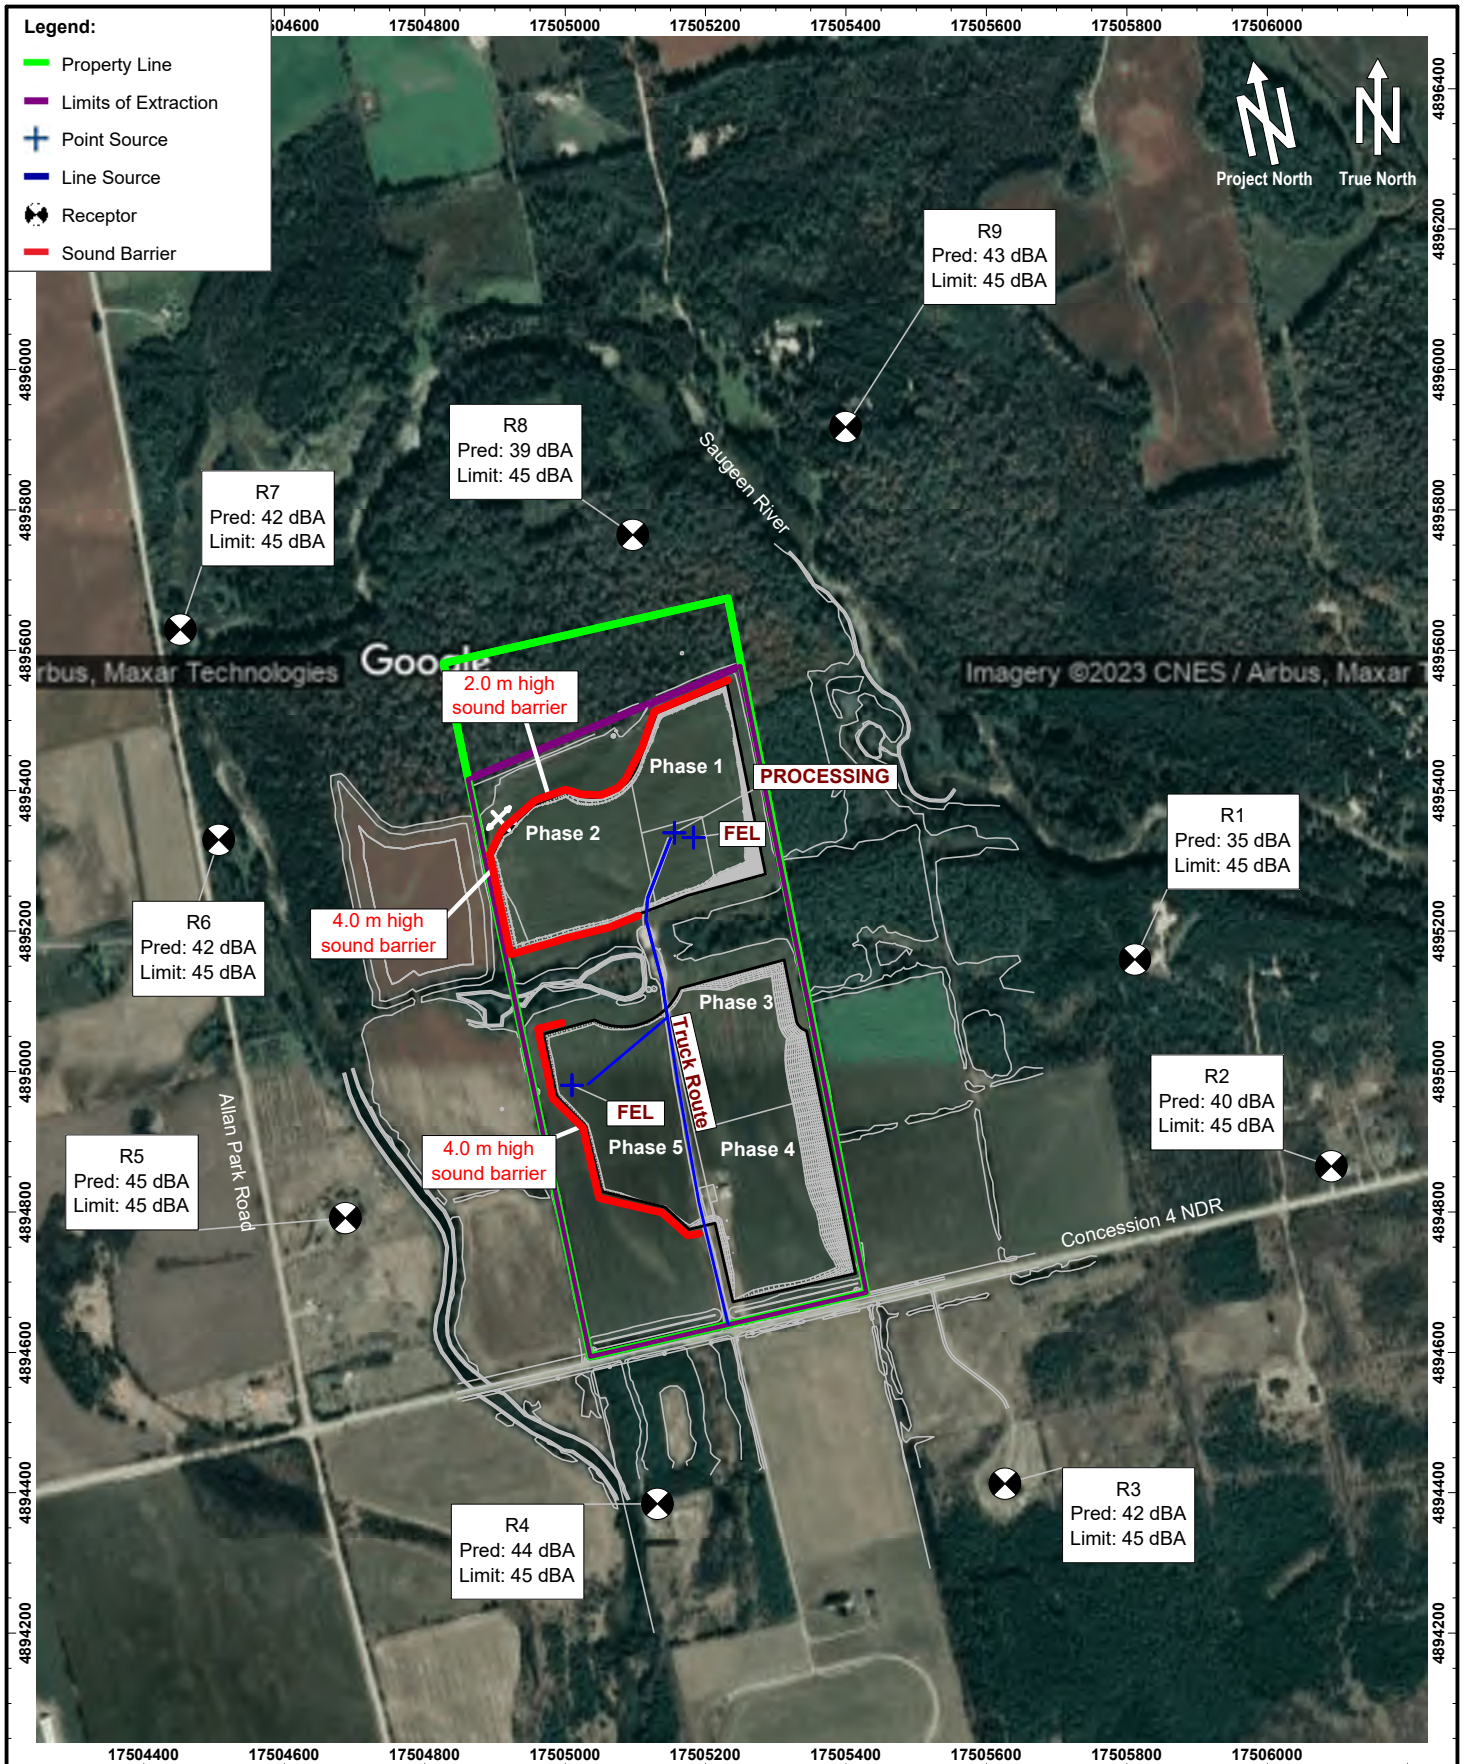


|                                                                                    |                                                                                                   |  |                                    |                                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--|------------------------------------|--------------------------------|
|  | <b>Title</b><br>Predicted Mitigated Sound Levels - Phase 5 (No Vacant Noise Sensitive Lots) (dBA) |  | <b>Date</b><br>June 22, 2023       | <b>Figure</b><br><div>4C</div> |
|                                                                                    | <b>Project Name</b><br>Bentick Gravel Pit                                                         |  | <b>Project No.</b><br>123-0064.000 |                                |

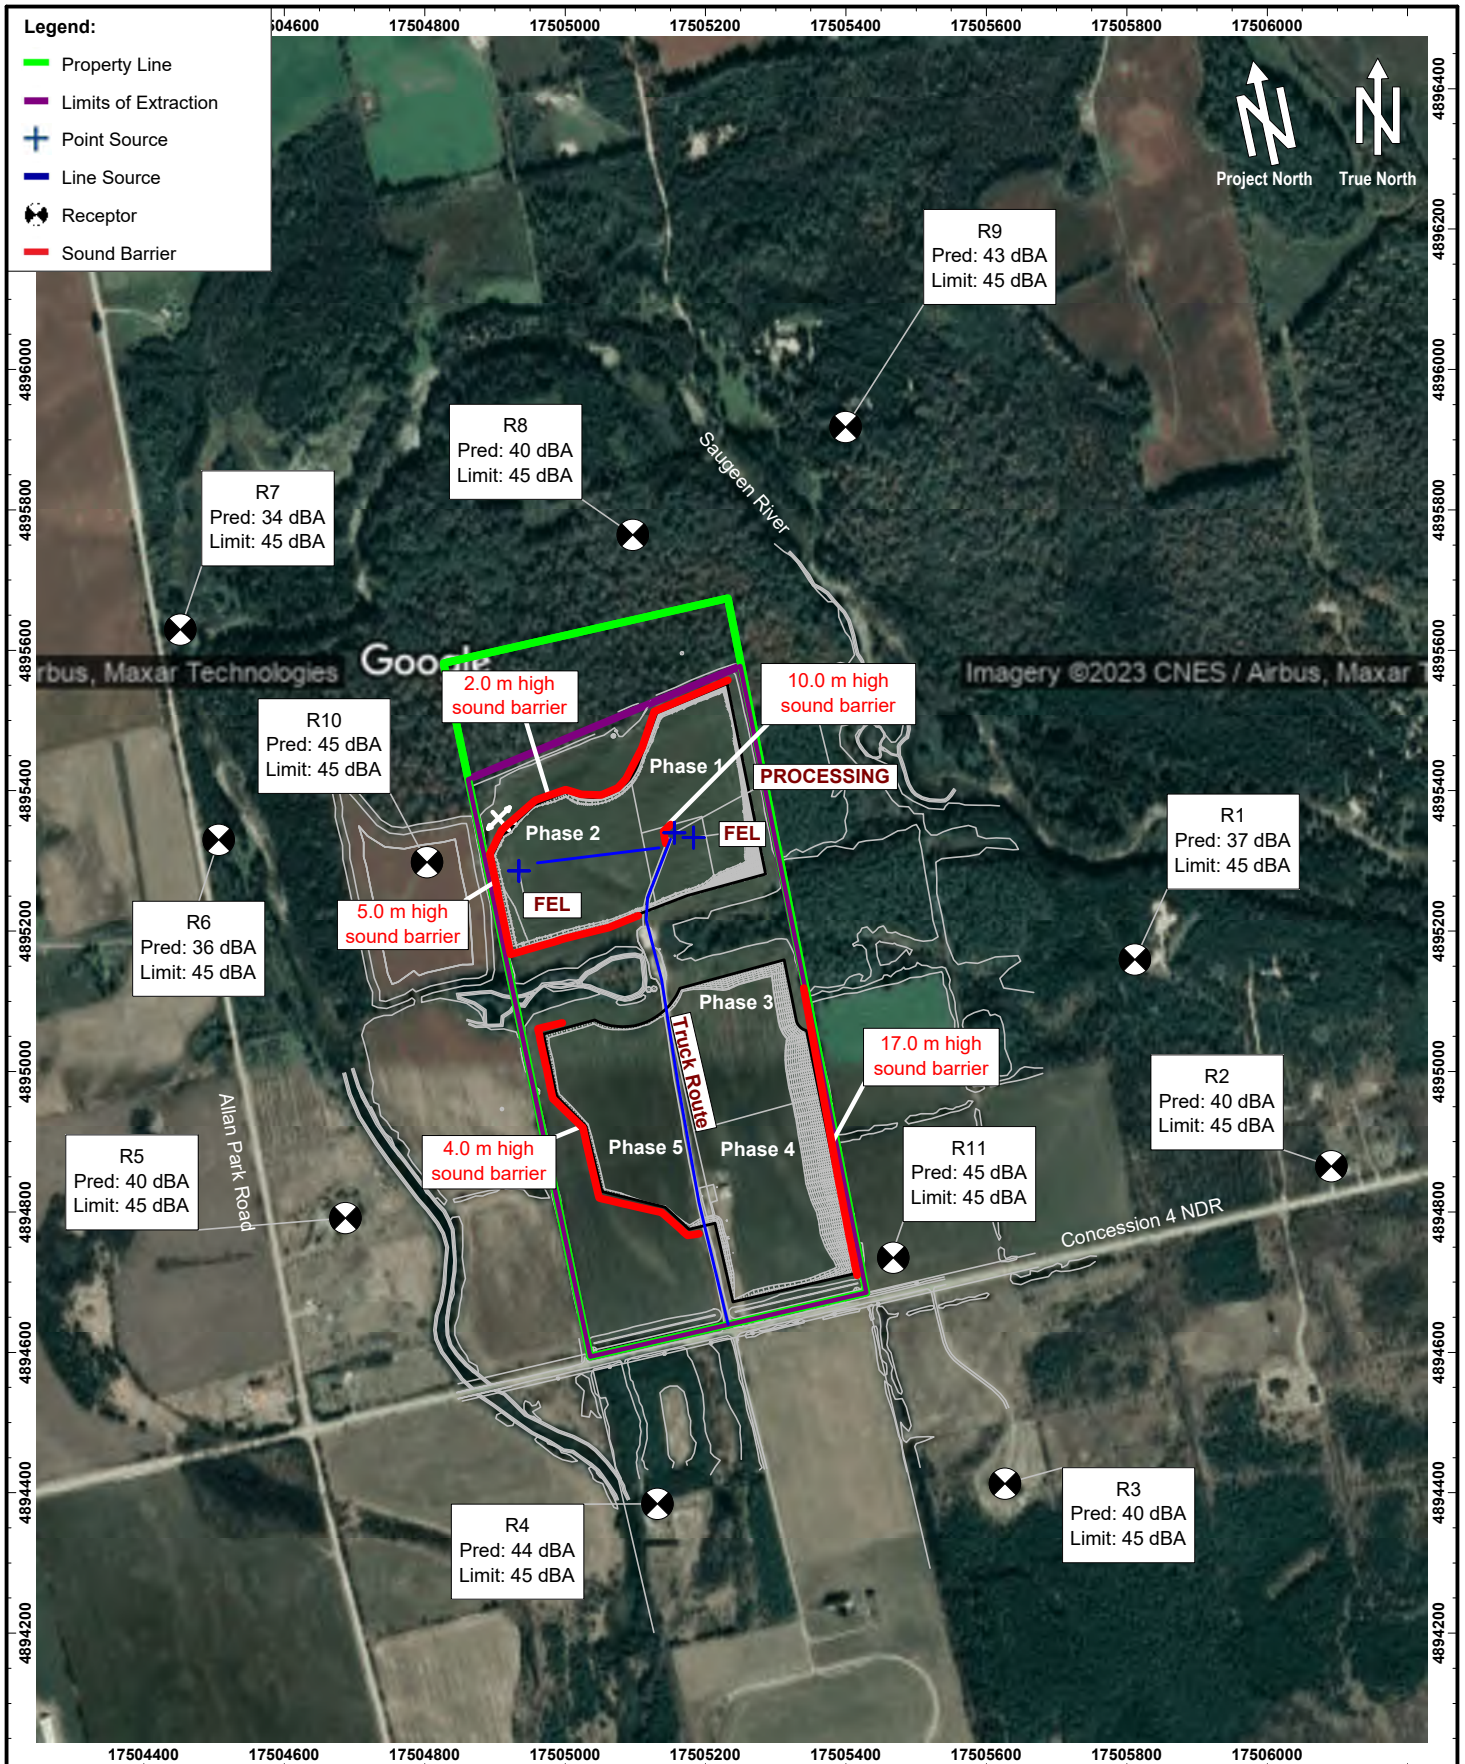

|                                                                                    |                                                                                                     |  |                                    |                                |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--|------------------------------------|--------------------------------|
|  | <b>Title</b><br>Predicted Mitigated Sound Levels - Phase 2 (With Vacant Noise Sensitive Lots) (dBA) |  | <b>Date</b><br>June 22, 2023       | <b>Figure</b><br><div>5A</div> |
|                                                                                    | <b>Project Name</b><br>Bentick Gravel Pit                                                           |  | <b>Project No.</b><br>123-0064.000 |                                |

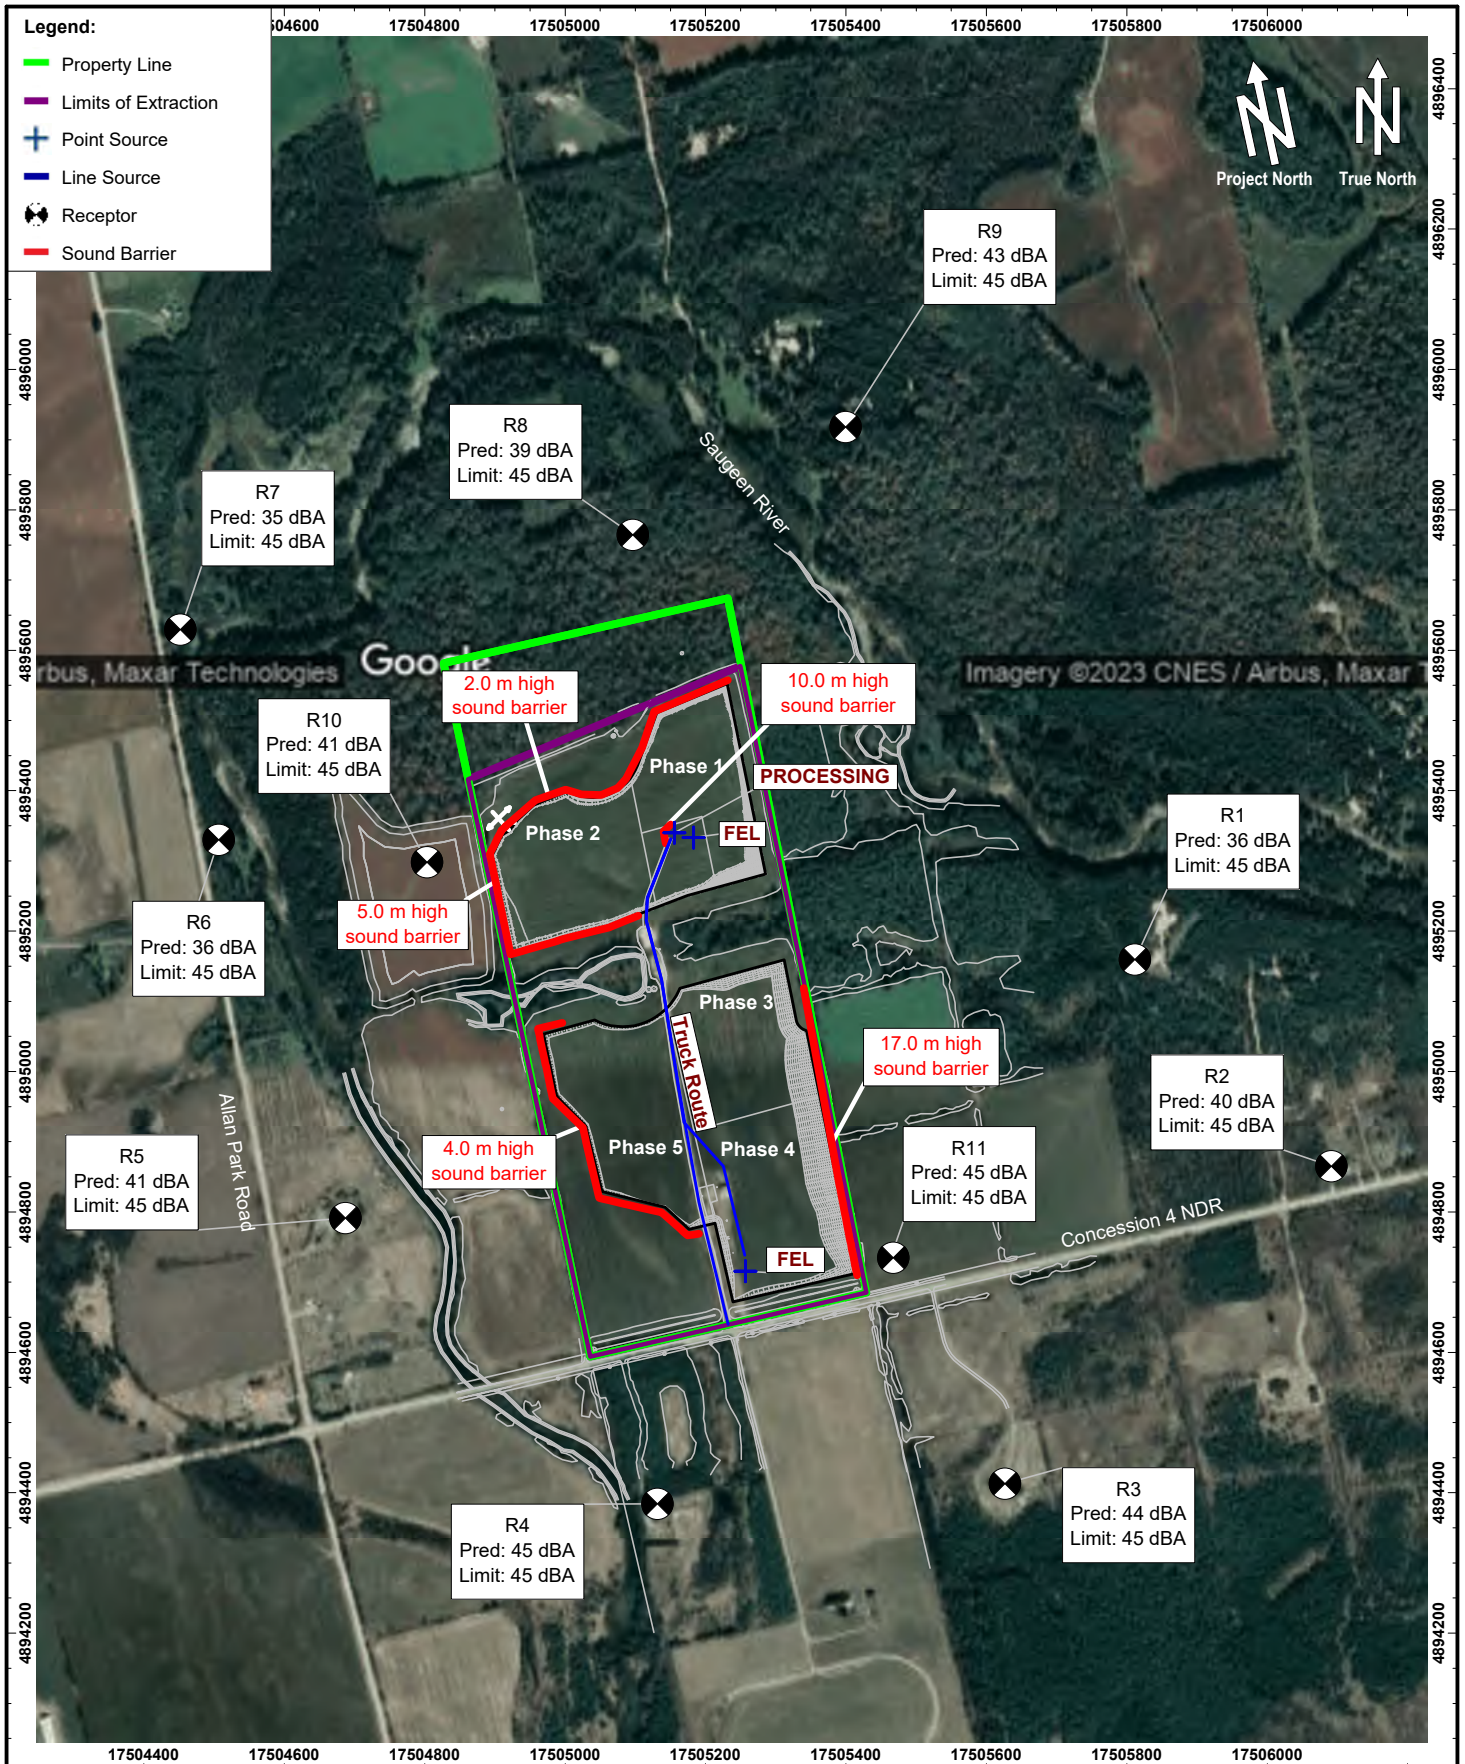

|                                                                                    |                                                                                     |  |               |        |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|---------------|--------|
|  | Title                                                                               |  | Date          | Figure |
|                                                                                    | Predicted Mitigated Sound Levels - Phase 4 (With Vacant Noise Sensitive Lots) (dBA) |  | June 22, 2023 | 5B     |
|                                                                                    | Project Name                                                                        |  | Project No.   |        |
|                                                                                    | Bentick Gravel Pit                                                                  |  | 123-0064.000  |        |

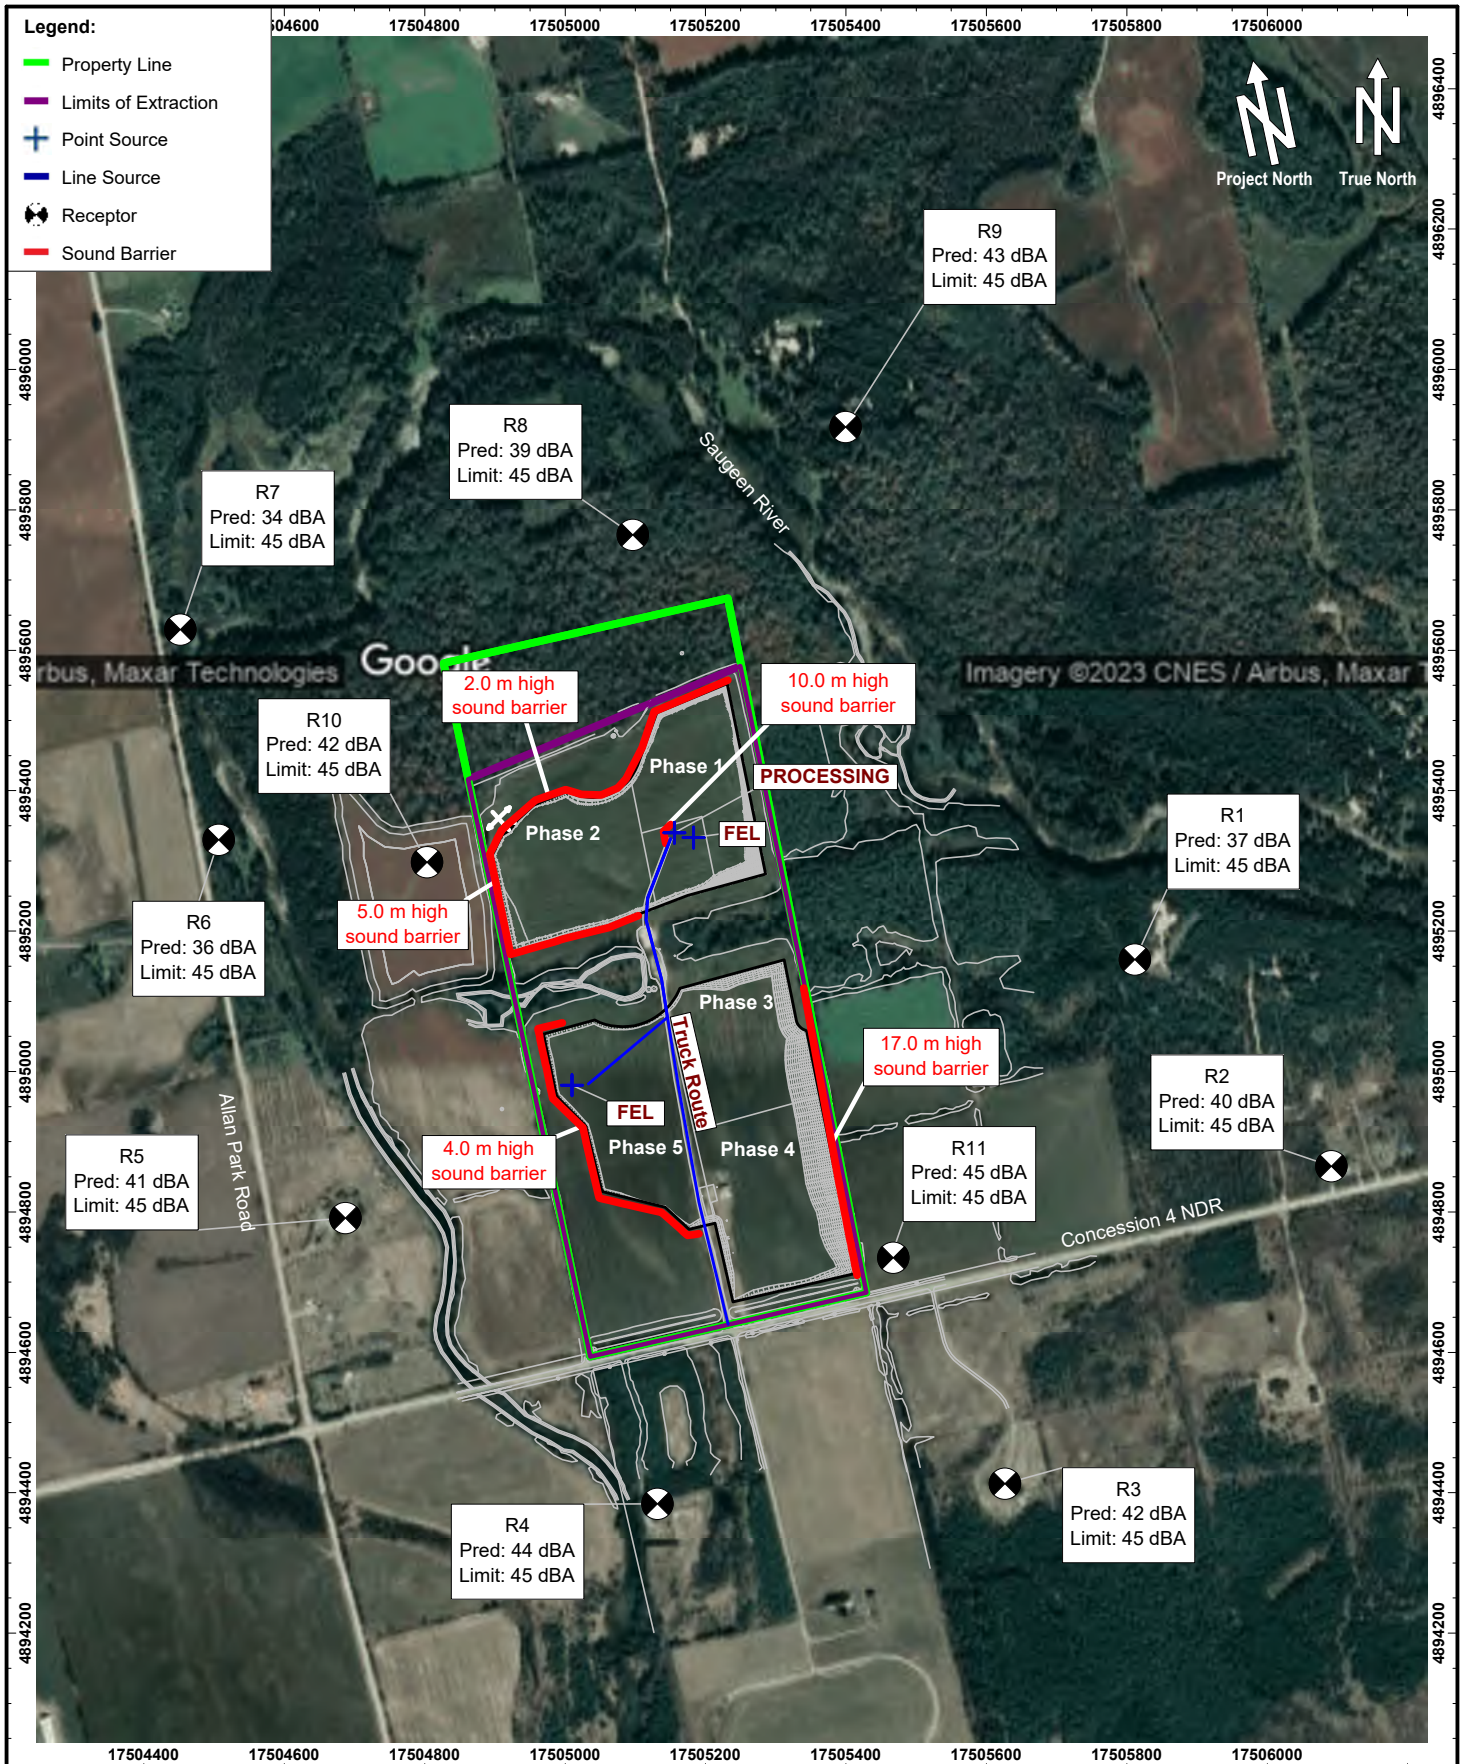

|                                                                                    |                                                                                                     |  |                                    |                                |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--|------------------------------------|--------------------------------|
|  | <b>Title</b><br>Predicted Mitigated Sound Levels - Phase 5 (With Vacant Noise Sensitive Lots) (dBA) |  | <b>Date</b><br>June 22, 2023       | <b>Figure</b><br><div>5C</div> |
|                                                                                    | <b>Project Name</b><br>Bentick Gravel Pit                                                           |  | <b>Project No.</b><br>123-0064.000 |                                |

## GLOSSARY OF TERMS

### **Class 1 Area (MECP definition):**

- means an area with an acoustical environment typical of a major population centre, where the background sound level is dominated by the urban hum.

### **Class 2 Area (MECP definition):**

- means an area with an acoustical environment that has qualities representative of both Class 1 and Class 3 Areas, and in which a low ambient sound level, normally occurring only between 2300 and 0700 hours in Class 1 Areas, will typically be realized as early as 1900 hours.
- Other characteristics which may indicate the presence of a Class 2 Area include:
  - absence of urban hum between 1900 and 2300 hours;
  - evening background sound level defined by natural environment and infrequency human activity; and
  - no clearly audible sound from stationary sources other than from those under impact assessment.

### **Class 3 Area (MECP definition):**

- means a rural area with an acoustical environment that is dominated by natural sounds having little or no road traffic, such as the following:
  - a small community with less than 1000 population;
  - agricultural area;
  - a rural recreational area such as a cottage or a resort area; or
  - a wilderness area.

### **Construction (MECP definition):**

- "Construction" includes erection, alteration, repair, dismantling, demolition, structural maintenance, painting, moving, land clearing, earthmoving, grading, excavating, the laying of pipe and conduit whether above or below ground level, street and highway building, concreting, equipment installation and alteration and the structural installation of construction components and materials in any form or for any purpose, and includes any work in connection therewith.

**Construction Equipment (MECP definition):**

- "Construction equipment" means any equipment or device designed and intended for use in construction, or material handling, including but not limited to, air compressors, pile drivers, pneumatic or hydraulic tools, bulldozers, tractors, excavators, trenchers, cranes, derricks, loaders, scrapers, pavers, generators, off-highway haulers or trucks, ditchers, compactors and rollers, pumps, concrete mixers, graders, or other material handling equipment.

**Conveyance (MECP definition):**

- "Conveyance" includes a vehicle and any other device employed to transport a person or persons or goods from place to place but does not include any such device or vehicle if operated only within the premises of a person.

**dB - Decibel:**

- See Sound (Pressure) Level.

**dBA - A weighted decibel:**

- A nationally and internationally standardized frequency weighting applied to the sound level spectrum to approximate the sensitivity of the human hearing mechanism as a function of frequency (pitch).

**L<sub>eq</sub> - The energy equivalent continuous sound level:**

- The constant sound level over the time period in question, that results in the same total sound energy as the actually varying sound. Must be associated with a time period.

**L<sub>x</sub> - Statistical Sound Level Descriptor:**

- The sound level exceeded for x% of the time. For all practical purposes, L<sub>90</sub> is the residual (lowest) ambient sound level.

**Sound (Pressure) Level:**

- Measured in decibels (dB) it is the logarithmic ratio of the instantaneous energy of a sound to the energy at the threshold of hearing. Mathematically:

$$SPL \text{ (dB)} = 20 \log \left( \frac{p}{p_0} \right)$$



- where  $p$  is the pressure due to the sound and  $p_0$  is the pressure at the threshold of hearing, taken as 20 micro Pascals.

**Stationary Source (MECP definition):**

- "Stationary source" means a source of sound which does not normally move from place to place and includes the premises of a person as one stationary source, unless the dominant source of sound on those premises is construction or a conveyance.

# **APPENDIX A**

## **OPERATIONS PLAN**

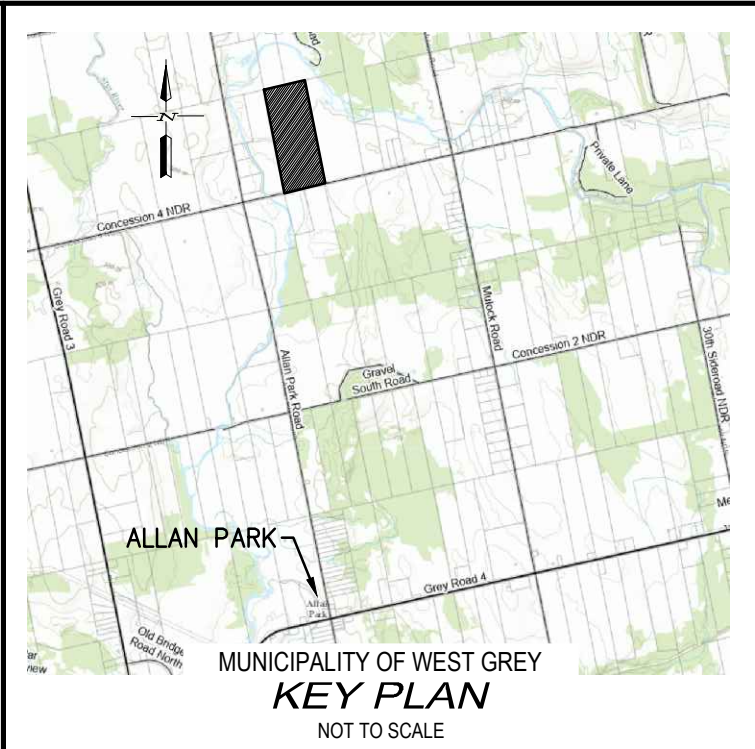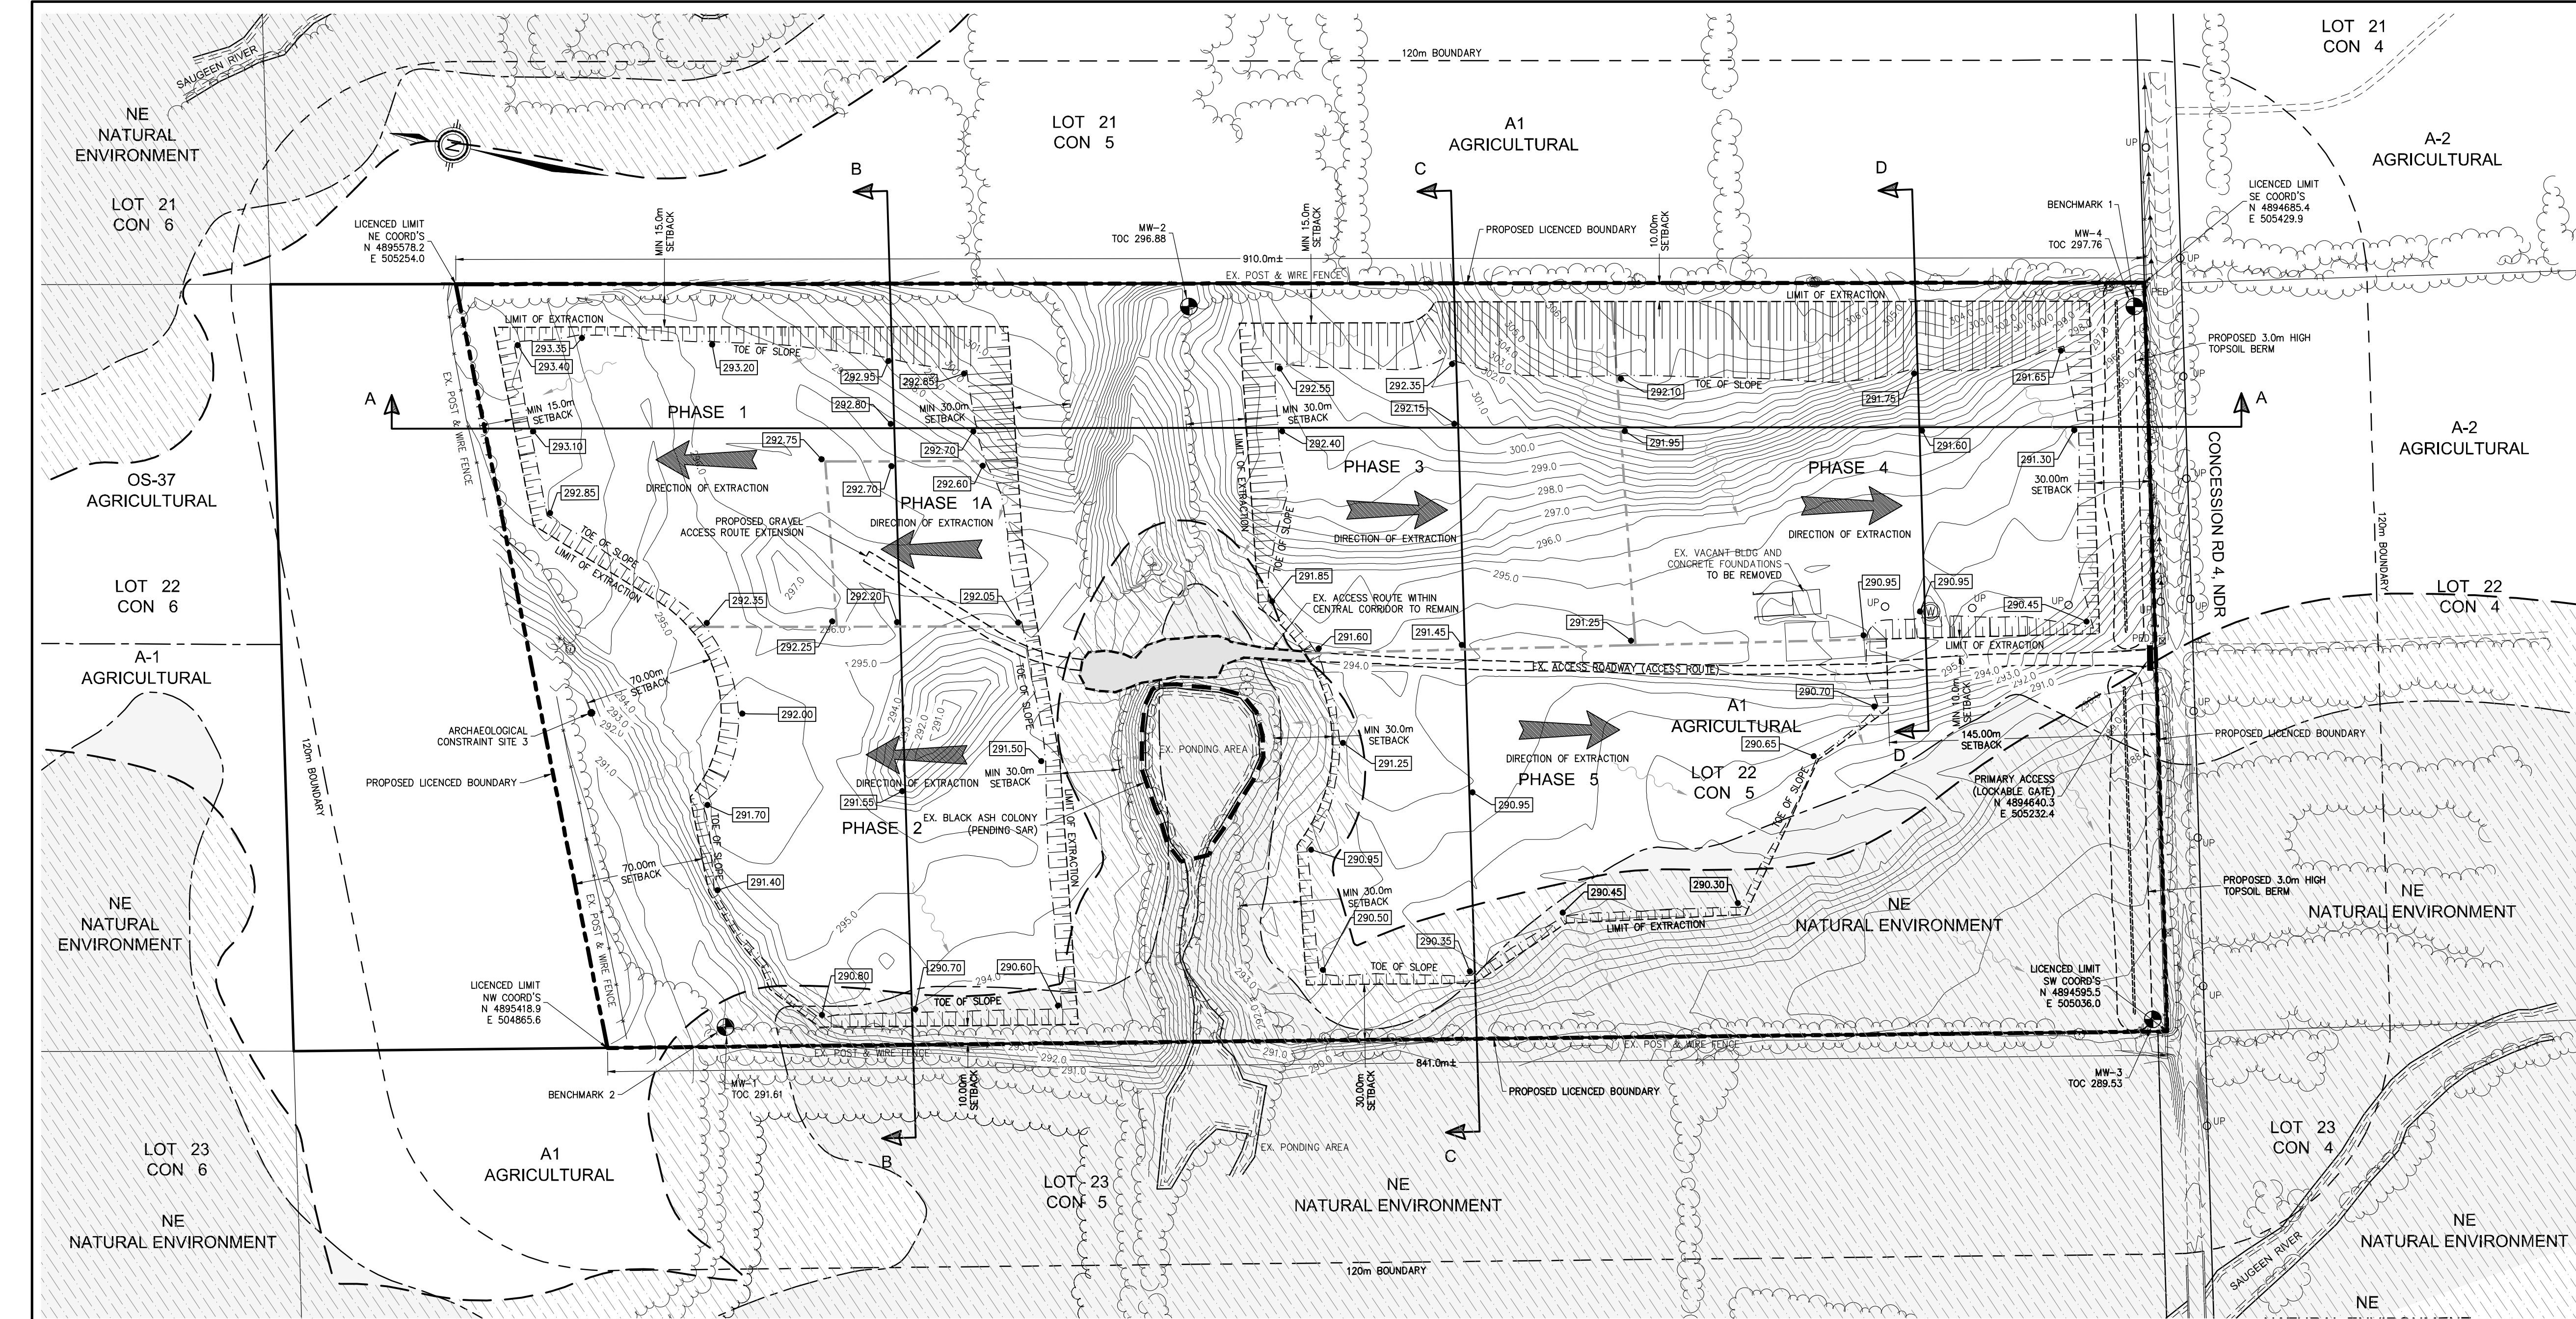

NOTES :

APPLICANT:  
JT EXCAVATING LTD.  
BOX 665  
615 ASPEN STREET  
DURHAM, ON  
N0G 1R0

APPLICANT'S SIGNATURE \_\_\_\_\_

DATE \_\_\_\_\_

BENCHMARK 1 ELEV. - 297.76m  
TOP OF CASING FOR MONITORING WELL MW-4, LOCATED AT THE SOUTH EAST CORNER OF THE SITE.

BENCHMARK 2 ELEV. - 291.61m  
TOP OF CASING FOR MONITORING WELL MW-1, LOCATED AT THE NORTH WEST CORNER OF THE SITE.

THE POSITION OF POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED.

BEFORE STARTING WORK, THE CONTRACTOR SHALL INFORM HIMSELF OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES, AND SHALL ASSUME ALL LIABILITY FOR ANY DAMAGE TO THEM.



|     |          |                             |        |
|-----|----------|-----------------------------|--------|
| 3   | SEP 7/22 | REVISED PER MECP COMMENTS   | M.D.N. |
| 2   | JUL 4/22 | REVISED LIMIT OF EXTRACTION | M.D.N. |
| 1   | APR 8/22 | REVISED PER AWS COMMENTS    | M.D.N. |
| NO. | DATE     | REVISION DESCRIPTION        | CHKD   |

BluePlan  
ENGINEERING

QUELPH | OWEN SOUND | LISTOWEL | HITCHENER | LONDON | HAMILTON | GTA  
1260 - 2ND AVENUE EAST, UNIT 1, OWEN SOUND, ON N4K 2J3  
TEL 519-376-1865  
www.gripblueplan.ca

JT EXCAVATING LTD.

PROPOSED AGGREGATE PIT

LOT 22, CONCESSION 5

GEOGRAPHIC TOWNSHIP OF BENTINCK

MUNICIPALITY OF WEST GREY

COUNTY OF GREY

|                        |                       |                        |                   |
|------------------------|-----------------------|------------------------|-------------------|
| DRAWN BY:<br>E.J.T.    | APPROVED BY:<br>C.S.  | PROJECT NO.:<br>220135 | DRAWING NO.:<br>2 |
| DESIGNED BY:<br>E.J.T. | DATE:<br>MAR 28, 2022 | SCALE:<br>1:2,000      |                   |


- NOTES:
- THIS SITE PLAN IS PREPARED UNDER THE AGGREGATE RESOURCES ACT FOR A CLASS "A", CATEGORY 3 LICENCE.
  - TOPOGRAPHIC SURVEY CONDUCTED BY QM BLUEPLAN ENGINEERING LIMITED ON MARCH 22, 2021.
  - PROPERTY BOUNDARIES ARE APPROXIMATE, AND ARE DERIVED FROM GREY COUNTY GIS MAPPING.
  - AREA TO BE LICENCED: 35.72 ha
  - AREA OF EXTRACTION: 20.70 ha
  - THE "HIGH" GROUNDWATER ELEVATION DESCENDS FROM APPROXIMATELY 291.9 m IN THE NORTH EASTERLY PORTION TO APPROXIMATELY 288.8 m IN THE SOUTH WESTERLY PORTION OF THE PROPOSED EXTRACTION AREA, AS RECORDED MARCH, 2022.
  - NO WATER DIVERSION OR EXTRACTION BELOW THE WATER TABLE IS PROPOSED. THE MAXIMUM DEPTH OF EXTRACTION IS TO BE FROM 290.30 m TO 293.40 m (MINIMUM 1.5 m ABOVE THE "HIGH" GROUNDWATER ELEVATION).
  - SURFACE WATER DRAINAGE WILL BE BY PERCOLATION OR EVAPORATION.
  - POTENTIAL EQUIPMENT TO BE USED ON-SITE FOR DAILY OPERATIONS MAY INCLUDE: HYDRAULIC EXCAVATORS, HYDRAULIC HAMMER, DOZERS, LOADERS, SKID STEERS, GRADER, CRUSHER, SCREENER, GENERATORS, AIR COMPRESSORS, AND TRUCKS. ALL EQUIPMENT USED ON-SITE WILL BE PORTABLE.
  - NO ON-SITE FUEL STORAGE IS EXPECTED TO BE PRESENT DURING OPERATIONS.
  - NO SCRAP MATERIALS OR REFUSE SHALL BE STORED ON-SITE.
  - NO ADDITIONAL TREE SCREENING IS PROPOSED.
  - POST & WIRE FENCE, AT LEAST 1.2 m IN HEIGHT, COMPLETE WITH SIGNAGE SHALL BE ERRECTED AROUND THE PERIMETER OF THE LICENCED AREA/PROPERTY PRIOR TO THE COMMENCEMENT OF EXTRACTION.
  - PIT OPERATIONS SHALL BE LIMITED TO THE HOURS OF 7:00 AM TO 7:00 PM, MONDAY TO FRIDAY AND 9:00 AM TO 2:00 PM, SATURDAY WITH NO SUNDAY OPERATIONS.
  - ANY WOOD OF VALUE TAKEN DURING CLEARING OPERATIONS SHALL BE USED AS FIRE WOOD. OTHER WOOD AND STUMPS SHALL BE CHIPPED AND USED IN THE REHABILITATION OF THE SITE OR DISPOSED OF OFF-SITE IN ACCORDANCE WITH APPLICABLE MECP GUIDELINES.
  - TOPSOIL AND OVERBURDEN:
    - TOPSOIL MUST BE STRIPPED SEQUENTIALLY PRIOR TO PIT EXTRACTION.
    - ALL TREES WITHIN 5 METRES OF THE LIMITS OF EXTRACTION MUST BE REMOVED.
    - ALL TOPSOIL OR OVERBURDEN STRIPPED DURING OPERATIONS SHALL BE USED TO CREATE BERMS AS SHOWN ON THE PLAN. ANY REMAINING MATERIAL SHALL BE PLACED IN STOCKPILES ON-SITE WITH STABLE VEGETATED SIDE SLOPES FOR FUTURE SITE REHABILITATION.
    - TOPSOIL BERMS TO BE VEGETATED MANUALLY WITH PRAIRIE GRASS NATIVE SEED MIXTURE #8130 OR SIMILAR MIX. THE BERM SHOULD BE SEED AS THE BERM IS CONSTRUCTED IN ORDER TO PREVENT EROSION AND RUNOFF.
  - PHASING:
    - THE TOPSOIL AND OVERBURDEN FROM PHASE 1 SHALL BE USED TO CREATE BERMS AS SHOWN ON THE PLAN. ANY

- REMAINING MATERIAL SHALL BE PLACED IN STOCKPILES AWAY FROM THE LIMITS OF EXTRACTION AND USED FOR PHASE 1 REHABILITATION.
- AS PHASE 1 EXTRACTION NEARS COMPLETION, STRIPPING OF TOPSOIL AND OVERBURDEN IN PHASE 2 MAY COMMENCE. TOPSOIL AND OVERBURDEN STRIPPED FROM PHASE 2 SHALL BE USED TO CREATE BERMS OR PLACED IN STOCKPILES IN A SUITABLE LOCATION OR USED FOR REHABILITATION OF PHASE 1.
  - PHASE 1A IS TO REMAIN AS A PROCESSING AND EQUIPMENT STORAGE AREA.
  - AS PHASE 2 EXTRACTION NEARS COMPLETION, STRIPPING OF TOPSOIL AND OVERBURDEN IN PHASE 3 MAY COMMENCE. TOPSOIL AND OVERBURDEN STRIPPED FROM PHASE 3 SHALL BE PLACED IN STOCKPILES IN A SUITABLE LOCATION OR USED FOR THE REHABILITATION OF PHASES 1 & 2.
  - AS PHASE 3 EXTRACTION NEARS COMPLETION, STRIPPING OF TOPSOIL AND OVERBURDEN IN PHASE 4 MAY COMMENCE. TOPSOIL AND OVERBURDEN STRIPPED FROM PHASE 4 SHALL BE PLACED IN STOCKPILES IN A SUITABLE LOCATION OR USED FOR THE REHABILITATION OF PHASES 1 THROUGH 3.
  - AS PHASE 4 EXTRACTION NEARS COMPLETION, STRIPPING OF TOPSOIL AND OVERBURDEN IN PHASE 5 MAY COMMENCE. TOPSOIL AND OVERBURDEN STRIPPED FROM PHASE 5 SHALL BE PLACED IN STOCKPILES IN A SUITABLE LOCATION OR USED FOR THE REHABILITATION OF PHASES 1 THROUGH 4.
  - AFTER PHASE 5 EXTRACTION IS COMPLETE, TOPSOIL AND OVERBURDEN IN BERMS AND STOCKPILES MAY BE RELOCATED TO THE PIT FLOOR IN PHASE 5 AND PHASE 1A, OR OTHER PHASES THAT MAY REQUIRE IT TO FINALIZE REHABILITATION MEASURES.
  - STOCKPILES WILL BE LOCATED IN THE ACTIVE PHASE PROXIMAL TO THE WORKING FACE OR IN PHASE 1A (PROCESSING AREA) GREATER THAN 30 m FROM THE LICENCED BOUNDARY.
  - REGARDLESS OF THE PHASING SEQUENCE, MULTIPLE PHASES MAY BE OPEN AT ONE TIME IN ORDER TO ACHIEVE EXTRACTION OF OFFERING MATERIALS THAT MEET BLENDING REQUIREMENTS FOR AGGREGATE PRODUCT. NO MORE THAN 50% OF THE PREVIOUS PHASE SHALL REMAIN OPEN WHILE EXTRACTION PROCEEDS TO SUBSEQUENT PHASES.
  - THE INTERNAL HAUL ROUTE SHALL CONSIST OF THE EXISTING ACCESS ROADWAY WITH AN EXTENSION INTO THE PHASE 1A AREA.
  - THE MAXIMUM TONNAGE TO BE EXTRACTION IN ANY YEAR IS 200,000 TONNES.
  - PRIOR TO EXTRACTION WITHIN EACH PHASE, THE LIMIT OF EXTRACTION IS TO BE CLEARLY STAKED/DEMARKED. SETBACKS ARE TO BE CLEARLY STAKED AND VISIBLE AT ALL TIMES.
  - DUST IS TO BE MITIGATED ON-SITE WHEN REQUIRED USING WATER OR A PROVINCALLY APPROVED DUST SUPPRESSANT.
  - ON-SITE VACANT BUILDINGS ARE PROPOSED TO BE REMOVED PRIOR TO THE COMMENCEMENT OF EXTRACTION IN PHASE 4.
  - SPILLS RESPONSE PLAN:
    - ALL EMPLOYEES AND CONTRACTORS HANDLING FUEL AND/OR OTHER POTENTIAL CONTAMINANTS WILL BE INSTRUCTED AS TO THE PROPER USE AND SAFE HANDLING OF THESE SUBSTANCES.
    - ALL SPILLS OR RELEASES OF CONTAMINANTS ARE TO BE REPORTED IMMEDIATELY TO THE MECP SPILLS ACTION CENTRE: 1-800-268-6060.
    - ALL SPILLS OR CONTAMINANT RELEASES ARE TO BE REMEDIATED TO MEET THE REQUIREMENTS OF THE ENVIRONMENTAL PROTECTION ACT AND ASSOCIATED REGULATIONS.
    - IN CASE OF SPILL, THE FOLLOWING ACTIONS ARE TO BE TAKEN:
      - CHECK FOR HAZARDOUS CONDITIONS - CALL 911 WHERE HAZARDOUS CONDITIONS EXIST.
      - CALL THE SUPERVISOR/OWNER AND REPORT THE SPILL.
      - WHERE SAFE TO DO SO, STOP THE SOURCE OF THE SPILL (THIS MAY INCLUDE UP-RIGHTING CONTAINERS, TURNING OFF PUMPS, CLOSING VALVES OR PLUGGING LEAKS), CONTAIN THE RELEASE (USE AVAILABLE MATERIALS TO PREVENT THE SPREAD OF THE CONTAMINANTS AND PLACE CONTAMINATED MEDIA IN STORAGE CONTAINERS).
      - THE SUPERVISOR/OWNER AND QUALIFIED PERSONNEL SHALL DEVELOP AND IMPLEMENT A REMEDIAL PLAN AND REQUIREMENTS OF THE

- MECP (AS APPLICABLE).
- THE SPILLS RESPONSE PLAN IS TO BE POSTED ON-SITE AT ALL TIMES.
24. A SPILL CONTAINMENT AND CLEAN-UP KIT IS TO BE KEPT ON-SITE.
25. HYDROGEOLOGICAL STUDY NOTES:
- TO MAINTAIN SURFACE WATER FLOWS TO THE SAME LOW-LYING LOCATIONS, SLOPING OF THE RESTORED GRADES TO MAINTAIN SIMILAR CATCHMENT AREAS (PRE AND POST DEVELOPMENT) SHALL BE CONDUCTED.
26. EXTRACTION IS TO BE COMPLETED IN ONE LIFT, EXCEPT WHERE EXCAVATION DEPTHS EXCEED 5.0 METRES. THESE AREAS ARE TO BE COMPLETED IN TWO LIFTS, ENSURING THE OPEN FACE IS ADEQUATELY SLOPED FOR SAFE OPERATIONS. FACE HEIGHTS ARE TO MEET MINISTRY OF LABOUR REGULATIONS.
27. NO NEW BUILDINGS OR OTHER STRUCTURES ARE PROPOSED ON THE SITE AS PART OF AGGREGATE OPERATIONS. THE EXISTING VACANT AGRICULTURAL BUILDINGS SHALL BE REMOVED PRIOR TO COMMENCEMENT OF EXTRACTIONS.
28. A GATE SHALL BE ERRECTED AND MAINTAINED AT EACH ENTRANCE TO, AND EXIT FROM, THE SITE. EACH GATE IS TO BE KEPT CLOSED WHEN THE SITE IS NOT IN OPERATION.
29. NO AGGREGATE RECYCLING WILL BE CONDUCTED ON THE SITE.
30. NATURAL ENVIRONMENT TECHNICAL REPORT NOTES:
- THE LIMIT OF EXTRACTION SHALL MAINTAIN A MINIMUM SEPARATION WIDTH, TO IDENTIFIED NATURAL ENVIRONMENT FEATURES AS OUTLINED ON FIGURE 9 OF THE NETR, WITH NO DISTURBANCES WITHIN THE NATURAL ENVIRONMENT SETBACKS OTHER THAN THAT FOR THE INTERNAL HAUL ROUTE CROSSING THE CENTRAL RAVINE FEATURE.
  - 30m FROM THE WOODLAND EDGE OF THE CENTRAL RAVINE, AND WETLAND FEATURE BEING VEGETATION COMMUNITY NUMBERS 2, 3, 4, 5 AND 6.
  - 15m FROM THE SIGNIFICANT WOODLAND ALONG THE NORTH BOUNDARY AND NORTHEAST PROPERTY CORNER, BEING VEGETATION COMMUNITY NUMBERS 1 AND 2.
  - ANY ACCESS ROUTE UPGRADES OR WIDTH EXPANSIONS THAT MAY BE REQUIRED SHALL BE FOCUSED AWAY FROM THE WEST SIDE OF THE ROUTE, ADJACENT TO THE BLACK ASH COLONY AND WETLAND ENVIRONMENT.
  - THE DEPTH OF EXTRACTION SHALL DEMONSTRATE NO NEGATIVE HYDROGEOLOGICAL OR DRAW-DOWN INFLUENCES THAT COULD NEGATIVELY IMPACT THE WETLAND FEATURE OR ITS IDENTIFIED ECOLOGICAL FUNCTIONS OR THE HEADWATER AREA OF THE WATERCOURSE FEATURE.
31. THIS SITE IS NOT SITUATED IN A DESIGNATED SOURCE WATER PROTECTION AREA. THEREFORE, SOURCE WATER PROTECTION POLICIES DO NOT APPLY TO THIS SITE.

VARIATIONS TO OPERATIONAL STANDARDS

NONE AT THIS TIME.

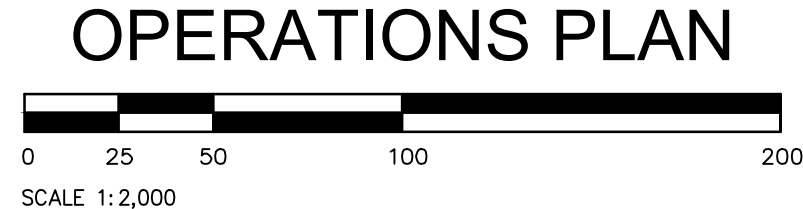

LEGEND

- EXISTING DITCH / WATERCOURSE
- EXISTING FENCELINE
- EXISTING GROUND CONTOUR
- EXISTING TREELINE
- 120m BOUNDARY LIMIT
- BOUNDARY OF AREA TO BE LICENCED
- PROPOSED PHASING LIMIT
- PROPOSED FENCED AREA OF LICENSE LIMIT
- ZONING BOUNDARY
- PROPOSED LIMIT OF EXTRACTION
- PROPOSED BOTTOM OF SLOPE
- PROPOSED SLOPE FENCE
- LIMIT OF SIGNIFICANT WILDLIFE CONSTRAINT ZONE
- PROPOSED EXCAVATION ELEVATION
- DIRECTION OF SURFACE FLOW
- TESTHOLE LOCATION
- MONITORING WELL / PIEZOMETER LOCATION
- CURRENT ZONING
- CURRENT LAND USE
- PRIVATE SUPPLY WELL (APPROXIMATE LOCATION)
- SAUGEEN VALLEY CONSERVATION AUTHORITY REGULATED AREA (O.REG. 169/06 SCREENING AREA)
- PRIMARY ENTRANCE / EXIT FROM THE SITE
- INTERNAL ACCESS ROUTE

FILE: C:\Users\jtw21\OneDrive\Documents\JTW21\BluePlan\111570202 3.55.09 PM PLOTTED BY: E.J. Twining - QM BluePlan 11/18/2022 8:50:09 AM  
LAST SAVED BY: E.J. Twining 11/18/2022 3:55:09 PM

# **APPENDIX B**

## **STATIONARY NOISE CALCULATION DETAILS**

Bentinck Gravel Pit

Point Sources

| Name       | Sel. | M. | ID        | Result. PWL |         |       | Lw / Li |       |       | Correction |         |       | Sound Reduction |      | Attenuation | Operating Time |         |       | K0   | Freq.  | Direct. | Height | Coordinates |            |        |
|------------|------|----|-----------|-------------|---------|-------|---------|-------|-------|------------|---------|-------|-----------------|------|-------------|----------------|---------|-------|------|--------|---------|--------|-------------|------------|--------|
|            |      |    |           | Day         | Evening | Night | Type    | Value | norm. | Day        | Evening | Night | R               | Area |             | Day            | Special | Night |      |        |         |        | X           | Y          | Z      |
|            |      |    |           | (dBA)       | (dBA)   | (dBA) |         |       |       | dB(A)      | dB(A)   | dB(A) |                 | (m²) |             | (min)          | (min)   | (min) | (dB) | (Hz)   |         | (m)    | (m)         | (m)        | (m)    |
| PROCESSING |      |    | PRCSG_ALL | 121.9       | 121.9   | 121.9 | Lw      | PRCSG |       | 0.0        | 0.0     | 0.0   |                 |      |             |                |         |       | 0.0  | (none) |         | 3.50   | 17505155.60 | 4895340.05 | 295.96 |
| FEL        |      |    | FEL_ALL   | 107.4       | 107.4   | 107.4 | Lw      | FEL   |       | 0.0        | 0.0     | 0.0   |                 |      |             |                |         |       | 0.0  | (none) |         | 2.50   | 17505182.91 | 4895333.19 | 295.09 |
| FEL        |      | ~  | FEL_P1    | 107.4       | 107.4   | 107.4 | Lw      | FEL   |       | 0.0        | 0.0     | 0.0   |                 |      |             |                |         |       | 0.0  | (none) |         | 2.50   | 17505198.40 | 4895489.87 | 295.70 |
| FEL        |      |    | FEL_P2    | 107.4       | 107.4   | 107.4 | Lw      | FEL   |       | 0.0        | 0.0     | 0.0   |                 |      |             |                |         |       | 0.0  | (none) |         | 2.50   | 17504934.18 | 4895285.70 | 293.43 |
| FEL        |      | ~  | FEL_P4    | 107.4       | 107.4   | 107.4 | Lw      | FEL   |       | 0.0        | 0.0     | 0.0   |                 |      |             |                |         |       | 0.0  | (none) |         | 2.50   | 17505256.99 | 4894715.73 | 293.27 |
| FEL        |      | ~  | FEL_P5    | 107.4       | 107.4   | 107.4 | Lw      | FEL   |       | 0.0        | 0.0     | 0.0   |                 |      |             |                |         |       | 0.0  | (none) |         | 2.50   | 17505009.84 | 4894980.54 | 292.98 |

Line Sources

| Name | Sel | M. | ID       | Result. PWL  |                  |                | Result. PWL' |                  |                | Lw / Li |             | Correction     |              |                  | Sound Reduction |   | Attenuation | Operating Time |              |                  | K0  | Freq. | Direct. | Moving Pt. Src |        |                 |
|------|-----|----|----------|--------------|------------------|----------------|--------------|------------------|----------------|---------|-------------|----------------|--------------|------------------|-----------------|---|-------------|----------------|--------------|------------------|-----|-------|---------|----------------|--------|-----------------|
|      |     |    |          | Day<br>(dBA) | Evening<br>(dBA) | Night<br>(dBA) | Day<br>(dBA) | Evening<br>(dBA) | Night<br>(dBA) | Type    | Value       | norm.<br>dB(A) | Day<br>dB(A) | Evening<br>dB(A) | Night<br>dB(A)  | R |             | Area<br>(m²)   | Day<br>(min) | Special<br>(min) |     |       |         | Night<br>(min) | Number | Speed<br>(km/h) |
| ~    |     |    | TRKS_ALL | 101.6        | -8.4             | -8.4           | 73.1         | -36.9            | -36.9          | PWL-Pt  | Heavy_20kph | 0.0            | 0.0          | 0.0              | 0.0             |   | 0.0         | (none)         | 10.0         | 0.0              | 0.0 | 20.0  |         |                |        |                 |
|      |     |    | TRKS_P5  | 99.2         | -10.8            | -10.8          | 73.1         | -36.9            | -36.9          | PWL-Pt  | Heavy_20kph | 0.0            | 0.0          | 0.0              | 0.0             |   | 0.0         | (none)         | 10.0         | 0.0              | 0.0 | 20.0  |         |                |        |                 |
|      |     |    | TRKS_P4  | 104.1        | -8.9             | -8.9           | 76.1         | -36.9            | -36.9          | PWL-Pt  | Heavy_20kph | 0.0            | 0.0          | 0.0              | 0.0             |   | 0.0         | (none)         | 20.0         | 0.0              | 0.0 | 20.0  |         |                |        |                 |
|      |     |    | TRKS_P2  | 98.5         | -14.5            | -14.5          | 76.1         | -36.9            | -36.9          | PWL-Pt  | Heavy_20kph | 0.0            | 0.0          | 0.0              | 0.0             |   | 0.0         | (none)         | 20.0         | 0.0              | 0.0 | 20.0  |         |                |        |                 |
|      |     |    | TRKS_P1  | 96.8         | -16.2            | -16.2          | 76.1         | -36.9            | -36.9          | PWL-Pt  | Heavy_20kph | 0.0            | 0.0          | 0.0              | 0.0             |   | 0.0         | (none)         | 20.0         | 0.0              | 0.0 | 20.0  |         |                |        |                 |
|      |     |    |          |              |                  |                |              |                  |                |         |             |                |              |                  |                 |   |             |                |              |                  |     |       |         |                |        |                 |

Sound Level Library

| Name                          | ID          | Type | Octave Spectrum (dB) |      |       |       |       |       |       |       |       |       |       |       | Source              |
|-------------------------------|-------------|------|----------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------------|
|                               |             |      | Weight.              | 31.5 | 63    | 125   | 250   | 500   | 1000  | 2000  | 4000  | 8000  | A     | lin   |                     |
| CAT 380 front end loader      | FEL         | Lw   |                      | 0.0  | 115.0 | 110.0 | 108.0 | 101.0 | 102.0 | 101.0 | 94.0  | 93.0  | 107.4 | 117.2 | Manufacturer's data |
| Processing Plant              | PRCSG       | Lw   |                      |      | 119.0 | 122.0 | 114.0 | 116.0 | 116.0 | 115.0 | 115.0 | 109.0 | 121.9 | 126.2 | VCL Database        |
| Heavy truck movement - 20 kph | Heavy_20kph | Lw   |                      | 0.0  | 111.8 | 110.3 | 106.4 | 102.6 | 99.7  | 97.7  | 95.6  | 92.1  | 106.1 | 115.3 | VCL Database        |

## Receiver

Name: (untitled)

ID: R1

X: 17505811.60 m

Y: 4895159.53 m

Z: 309.50 m

Point Source, ISO 9613, Name: "PROCESSING", ID: "PRCSG\_ALL"

| Nr. | X           | Y          | Z      | Refl. | DEN | Freq. | Lw    | l/a | Optime | K0   | Di   | Adiv | Aatm | Agr  | Afol | Ahous | Abar | Cmet | RL   | Lr    |
|-----|-------------|------------|--------|-------|-----|-------|-------|-----|--------|------|------|------|------|------|------|-------|------|------|------|-------|
|     | (m)         | (m)        | (m)    |       |     | (Hz)  | dB(A) | dB  | dB     | (dB) | (dB) | (dB) | (dB) | (dB) | (dB) | (dB)  | (dB) | (dB) | (dB) | dB(A) |
| 3   | 17505155.60 | 4895340.05 | 295.96 | 0     | DEN | A     | 121.9 | 0.0 | 0.0    | 0.0  | 0.0  | 67.7 | 4.7  | -1.4 | 10.7 | 0.0   | 6.1  | 0.0  | 0.0  | 34.1  |

Point Source, ISO 9613, Name: "FEL", ID: "FEL\_ALL"

| Nr. | X           | Y          | Z      | Refl. | DEN | Freq. | Lw    | l/a | Optime | K0   | Di   | Adiv | Aatm | Agr  | Afol | Ahous | Abar | Cmet | RL   | Lr    |
|-----|-------------|------------|--------|-------|-----|-------|-------|-----|--------|------|------|------|------|------|------|-------|------|------|------|-------|
|     | (m)         | (m)        | (m)    |       |     | (Hz)  | dB(A) | dB  | dB     | (dB) | (dB) | (dB) | (dB) | (dB) | (dB) | (dB)  | (dB) | (dB) | (dB) | dB(A) |
| 7   | 17505182.91 | 4895333.19 | 295.09 | 0     | DEN | A     | 107.4 | 0.0 | 0.0    | 0.0  | 0.0  | 67.3 | 2.9  | -1.2 | 9.4  | 0.0   | 6.0  | 0.0  | 0.0  | 22.9  |

Point Source, ISO 9613, Name: "FEL", ID: "FEL\_P2"

| Nr. | X           | Y          | Z      | Refl. | DEN | Freq. | Lw    | l/a | Optime | K0   | Di   | Adiv | Aatm | Agr  | Afol | Ahous | Abar | Cmet | RL   | Lr    |
|-----|-------------|------------|--------|-------|-----|-------|-------|-----|--------|------|------|------|------|------|------|-------|------|------|------|-------|
|     | (m)         | (m)        | (m)    |       |     | (Hz)  | dB(A) | dB  | dB     | (dB) | (dB) | (dB) | (dB) | (dB) | (dB) | (dB)  | (dB) | (dB) | (dB) | dB(A) |
| 10  | 17504934.18 | 4895285.70 | 293.43 | 0     | DEN | A     | 107.4 | 0.0 | 0.0    | 0.0  | 0.0  | 70.0 | 3.6  | -1.7 | 4.5  | 0.0   | 6.4  | 0.0  | 0.0  | 24.6  |

Line Source, ISO 9613, Name: "", ID: "TRKS\_P2"

| Nr. | X           | Y          | Z      | Refl. | DEN | Freq. | Lw    | l/a  | Optime | K0   | Di   | Adiv | Aatm | Agr  | Afol | Ahous | Abar | Cmet | RL   | Lr    |
|-----|-------------|------------|--------|-------|-----|-------|-------|------|--------|------|------|------|------|------|------|-------|------|------|------|-------|
|     | (m)         | (m)        | (m)    |       |     | (Hz)  | dB(A) | dB   | dB     | (dB) | (dB) | (dB) | (dB) | (dB) | (dB) | (dB)  | (dB) | (dB) | (dB) | dB(A) |
| 14  | 17505046.99 | 4895308.04 | 294.21 | 0     | D   | A     | 76.1  | 22.4 | 0.0    | 0.0  | 0.0  | 68.8 | 3.0  | -1.5 | 7.0  | 0.0   | 6.2  | 0.0  | 0.0  | 14.9  |
| 14  | 17505046.99 | 4895308.04 | 294.21 | 0     | N   | A     | -36.9 | 22.4 | 0.0    | 0.0  | 0.0  | 68.8 | 3.0  | -1.5 | 7.0  | 0.0   | 6.2  | 0.0  | 0.0  | -98.2 |
| 14  | 17505046.99 | 4895308.04 | 294.21 | 0     | E   | A     | -36.9 | 22.4 | 0.0    | 0.0  | 0.0  | 68.8 | 3.0  | -1.5 | 7.0  | 0.0   | 6.2  | 0.0  | 0.0  | -98.2 |

Line Source, ISO 9613, Name: "", ID: "TRKS\_ALL"

| Nr. | X           | Y          | Z      | Refl. | DEN | Freq. | Lw    | l/a  | Optime | K0   | Di   | Adiv | Aatm | Agr  | Afol | Ahous | Abar | Cmet | RL   | Lr     |
|-----|-------------|------------|--------|-------|-----|-------|-------|------|--------|------|------|------|------|------|------|-------|------|------|------|--------|
|     | (m)         | (m)        | (m)    |       |     | (Hz)  | dB(A) | dB   | dB     | (dB) | (dB) | (dB) | (dB) | (dB) | (dB) | (dB)  | (dB) | (dB) | (dB) | dB(A)  |
| 17  | 17505176.11 | 4894895.35 | 293.60 | 0     | D   | A     | 73.1  | 22.2 | 0.0    | 0.0  | 0.0  | 67.8 | 2.8  | -1.5 | 6.2  | 0.0   | 6.3  | 0.0  | 0.0  | 13.7   |
| 17  | 17505176.11 | 4894895.35 | 293.60 | 0     | N   | A     | -36.9 | 22.2 | 0.0    | 0.0  | 0.0  | 67.8 | 2.8  | -1.5 | 6.2  | 0.0   | 6.3  | 0.0  | 0.0  | -96.3  |
| 17  | 17505176.11 | 4894895.35 | 293.60 | 0     | E   | A     | -36.9 | 22.2 | 0.0    | 0.0  | 0.0  | 67.8 | 2.8  | -1.5 | 6.2  | 0.0   | 6.3  | 0.0  | 0.0  | -96.3  |
| 24  | 17505211.57 | 4894726.59 | 293.07 | 0     | D   | A     | 73.1  | 22.5 | 0.0    | 0.0  | 0.0  | 68.4 | 2.9  | -1.0 | 6.1  | 0.0   | 10.4 | 0.0  | 0.0  | 8.7    |
| 24  | 17505211.57 | 4894726.59 | 293.07 | 0     | N   | A     | -36.9 | 22.5 | 0.0    | 0.0  | 0.0  | 68.4 | 2.9  | -1.0 | 6.1  | 0.0   | 10.4 | 0.0  | 0.0  | -101.3 |
| 24  | 17505211.57 | 4894726.59 | 293.07 | 0     | E   | A     | -36.9 | 22.5 | 0.0    | 0.0  | 0.0  | 68.4 | 2.9  | -1.0 | 6.1  | 0.0   | 10.4 | 0.0  | 0.0  | -101.3 |
| 27  | 17505149.38 | 4895054.26 | 294.15 | 0     | D   | A     | 73.1  | 21.9 | 0.0    | 0.0  | 0.0  | 67.5 | 2.8  | -1.5 | 6.1  | 0.0   | 6.2  | 0.0  | 0.0  | 13.8   |
| 27  | 17505149.38 | 4895054.26 | 294.15 | 0     | N   | A     | -36.9 | 21.9 | 0.0    | 0.0  | 0.0  | 67.5 | 2.8  | -1.5 | 6.1  | 0.0   | 6.2  | 0.0  | 0.0  | -96.2  |
| 27  | 17505149.38 | 4895054.26 | 294.15 | 0     | E   | A     | -36.9 | 21.9 | 0.0    | 0.0  | 0.0  | 67.5 | 2.8  | -1.5 | 6.1  | 0.0   | 6.2  | 0.0  | 0.0  | -96.2  |
| 48  | 17505133.86 | 4895289.13 | 294.69 | 0     | D   | A     | 73.1  | 19.5 | 0.0    | 0.0  | 0.0  | 67.8 | 2.8  | -1.2 | 9.1  | 0.0   | 5.9  | 0.0  | 0.0  | 8.1    |
| 48  | 17505133.86 | 4895289.13 | 294.69 | 0     | N   | A     | -36.9 | 19.5 | 0.0    | 0.0  | 0.0  | 67.8 | 2.8  | -1.2 | 9.1  | 0.0   | 5.9  | 0.0  | 0.0  | -101.9 |
| 48  | 17505133.86 | 4895289.13 | 294.69 | 0     | E   | A     | -36.9 | 19.5 | 0.0    | 0.0  | 0.0  | 67.8 | 2.8  | -1.2 | 9.1  | 0.0   | 5.9  | 0.0  | 0.0  | -101.9 |
| 71  | 17505126.31 | 4895173.21 | 295.74 | 0     | D   | A     | 73.1  | 19.4 | 0.0    | 0.0  | 0.0  | 67.7 | 2.8  | 1.1  | 9.4  | 0.0   | 3.9  | 0.0  | 0.0  | 7.6    |
| 71  | 17505126.31 | 4895173.21 | 295.74 | 0     | N   | A     | -36.9 | 19.4 | 0.0    | 0.0  | 0.0  | 67.7 | 2.8  | 1.1  | 9.4  | 0.0   | 3.9  | 0.0  | 0.0  | -102.4 |
| 71  | 17505126.31 | 4895173.21 | 295.74 | 0     | E   | A     | -36.9 | 19.4 | 0.0    | 0.0  | 0.0  | 67.7 | 2.8  | 1.1  | 9.4  | 0.0   | 3.9  | 0.0  | 0.0  | -102.4 |
| 74  | 17505116.40 | 4895231.43 | 295.73 | 0     | D   | A     | 73.1  | 15.0 | 0.0    | 0.0  | 0.0  | 67.9 | 2.8  | 1.1  | 9.3  | 0.0   | 3.9  | 0.0  | 0.0  | 3.1    |
| 74  | 17505116.40 | 4895231.43 | 295.73 | 0     | N   | A     | -36.9 | 15.0 | 0.0    | 0.0  | 0.0  | 67.9 | 2.8  | 1.1  | 9.3  | 0.0   | 3.9  | 0.0  | 0.0  | -106.9 |
| 74  | 17505116.40 | 4895231.43 | 295.73 | 0     | E   | A     | -36.9 | 15.0 | 0.0    | 0.0  | 0.0  | 67.9 | 2.8  | 1.1  | 9.3  | 0.0   | 3.9  | 0.0  | 0.0  | -106.9 |

# **APPENDIX C**

## **SAMPLE PRODUCT INFORMATION**

# bbs-tek BACKALARM® Back-up Alarms



BBS-107  
BBS-102

## Heavy Duty



Ideal for dump trucks, bulldozers, loading shovels and all heavy earthmoving machinery.

- Conform to SAE J994 environmental standards
- Tough, durable, guaranteed waterproof (IP68)
- Solid-state, spark-free electronics, epoxy-sealed against mud, water and vibration
- Can be steam-cleaned and pressure-hosed
- CE and 'e' marked (EMC)

| STOCK CODE | MODEL   | VOLTS DC | SOUND LEVEL dB(A)@1m | FREQUENCY KHZ | CURRENT AMPS | SOUNDER UNIT | SIZE mm (WxHxD) | HOLE CENTRES (mm) |
|------------|---------|----------|----------------------|---------------|--------------|--------------|-----------------|-------------------|
| A0899      | BBS-107 | 24       | 107                  | Multi         | 1.0          | Driver       | 173x80x95       | 152               |
| A0898      | BBS-102 | 24       | 102                  | Multi         | 1.0          | Driver       | 173x80x95       | 152               |



BBS-97  
BBS-92

## Medium Duty



Ideal for trucks, buses and coaches, light mobile plant, forklift trucks and industrial vehicles.

- Conform to SAE J994 environmental standards
- Tough, durable, guaranteed waterproof (IP68)
- Solid-state, spark-free electronics, epoxy-sealed against mud, water and vibration
- Can be steam-cleaned and pressure-hosed
- CE and 'e' marked (EMC)

| STOCK CODE | MODEL  | VOLTS DC | SOUND LEVEL dB(A)@1m | FREQUENCY KHZ | CURRENT AMPS | SOUNDER UNIT | SIZE mm (WxHxD) | HOLE CENTRES (mm) |
|------------|--------|----------|----------------------|---------------|--------------|--------------|-----------------|-------------------|
| A0935      | BBS-97 | 12-24    | 97                   | Multi         | 0.5          | Speaker      | 127x65x76       | 98-108            |
| A0934      | BBS-92 | 12-24    | 92                   | Multi         | 0.5          | Speaker      | 127x65x76       | 98-108            |



BBS-87  
BBS-82  
BBS-77

## Light Duty



Ideal for forklift trucks, light commercial vehicles, MPVs and cars.

- Conform to SAE J994 environmental standards
- Tough, durable, guaranteed waterproof (IP68)
- Solid-state, spark-free electronics, epoxy-sealed against mud, water and vibration
- Can be steam-cleaned and pressure-hosed
- CE and 'e' marked (EMC)

| STOCK CODE | MODEL  | VOLTS DC | SOUND LEVEL dB(A)@1m | FREQUENCY KHZ | CURRENT AMPS | SOUNDER UNIT | SIZE mm (WxHxD) | HOLE CENTRES (mm) |
|------------|--------|----------|----------------------|---------------|--------------|--------------|-----------------|-------------------|
| A0897      | BBS-87 | 12-24    | 87                   | Multi         | 0.5          | Speaker      | 90x49x39        | 76                |
| A0896      | BBS-82 | 12-24    | 82                   | Multi         | 0.5          | Speaker      | 90x49x39        | 76                |
| A1397      | BBS-77 | 12-24    | 77                   | Multi         | 0.5          | Speaker      | 90x49x39        | 76                |

## Electric Forklift Truck

### Medium Duty



- Conform to SAE J994 environmental standards
- Tough, durable, guaranteed waterproof (IP68)
- Solid-state, spark-free electronics, epoxy-sealed against mud, water and vibration
- Can be steam-cleaned and pressure-hosed
- CE and 'e' marked (EMC)

| STOCK CODE | MODEL    | VOLTS DC | SOUND LEVEL dB(A)@1m | FREQUENCY KHZ | CURRENT AMPS | SOUNDER UNIT | SIZE mm (WxHxD) | HOLE CENTRES (mm) |
|------------|----------|----------|----------------------|---------------|--------------|--------------|-----------------|-------------------|
| A1323      | BBS-87HV | 36-80    | 87                   | Multi         | 0.15         | Speaker      | 127x65x76       | 98-108            |
| A1322      | BBS-82HV | 36-80    | 82                   | Multi         | 0.15         | Speaker      | 127x65x76       | 98-108            |



BBS-87HV  
BBS-82HV

# **APPENDIX D**

## **CURRICULUM VITAE**



Since joining Valcoustics in 2013, Mr. Dennis' (Greg's) responsibilities have included field measurements, analysis, computations, report preparation and project management. Greg has extensive experience in preparing environmental noise and vibration studies to support the land use approvals process to determine the impact from road, rail, and stationary noise sources onto adjacent land uses, both existing and proposed, as well as selection and analysis of noise mitigation measures, including sound barriers, architectural elements, and operation techniques. Projects are prepared for private and government sectors, involving residential, industrial, and commercial development. He is also regularly involved with architectural acoustic building design for aspects such as sound isolation, mechanical noise and vibration control and environmental noise impact.

Representative projects include King West Submarket/64-86 Bathurst Street, Toronto; 4845 Walker Road, Windsor; 258-270 Sheppard Avenue West, Toronto; 1 Milburn Street, Barrie; County Road 1 (8<sup>th</sup> Line), Beeton; 21 Old Kingston Road, Toronto; 416 Dundas Street East, Whitby; 4005 Hickory Drive, Mississauga; Holland Christian Homes/New Faith Manor, Brampton; 227 Harding Boulevard West, Richmond Hill; 11 & 19 Donna Mae Crescent, Thornhill; and many others.

## EDUCATION:

- **M.Eng.**, Penn State University, August 2020, Masters in Acoustics.
- **B.Eng.**, Queen's University, April 2013, Engineering Physics with concentration in Electrical Engineering.

## PROFESSIONAL AFFILIATION:

- Registered Professional Engineer, Professional Engineers of Ontario

## RELEVANT EXPERIENCE:

**Project Name:** Southwest Queensville  
**Location:** East Gwillimbury, Ontario, Canada  
**Duration:** 2017-current  
**Client:** Tercot Development Group

**Project Description:** Valcoustics was retained to complete an environmental noise study for a proposed residential development consisting of 82 lots/blocks. The largest noise source of concern is road traffic. Valcoustics/Greg is recommending noise mitigation measures to ensure noise levels from road traffic are within the applicable guideline limits.

**Project Name:** Holland Christian Homes – New Faith Manor  
**Location:** Brampton, Ontario, Canada  
**Duration:** 2017  
**Client:** sub-consultant to OCA Architects Inc.

**Project Description:** Valcoustics was retained to complete an environmental noise study to support the Site Plan Approval (SPA) application for a new Long-Term-Care (LTC) facility. The facility will consist of a 4-storey LTC building with towers on each side as well as the re-purposing of Bethany Manor to the northeast of the proposed new building from LTC to assisted living. Valcoustics/Greg recommended mitigation measures to ensure noise levels from and onto the proposed development were both within the applicable guideline limits.

**Project Name:** 4785 Walker Road  
**Location:** Windsor, Ontario, Canada  
**Duration:** 2017-current  
**Client:** sub-consultant to Lassaline Planning Consultants

**Project Description:** Valcoustics was retained to complete an environmental noise and vibration study for a proposed mixed-use development consisting of 37 townhouses and a 3-storey residential building with ground floor commercial. The proposed development is located adjacent to the Canadian National Railway (CN) as well as in close proximity to an industrial/commercial facility. Valcoustics/Greg is recommending mitigation measures to ensure noise and vibration from the transportation and stationary noise sources are within the applicable guideline limits.

# JOHN EMELJANOW, P.Eng.

Principal Acoustical Engineer



Mr. Emeljanow (John) has been employed with Valcoustics Canada Ltd. for over 30 years. He is a Principal Engineer, a Designated Consulting Engineer with the Professional Engineers of Ontario, a graduate of the Ministry of the Environment's Acoustics Technology in Land Use Planning Course and has given evidence as an expert witness before the Ontario Municipal Board and Local Planning Appeals Tribunal, dealing with environmental acoustics issues in land use planning. John has acted as project manager on a number of major architectural and environmental projects. His responsibilities include noise/vibration measurement, analysis, design computations, and report preparation. In addition, John was an active contributor to the acoustics section of the Architectural Design Standards for Ontario Courthouses prepared for the Ministry of the Attorney General. As an expert witness in acoustics, he has appeared multiple times before the Supreme Court of Ontario, the Ontario Municipal Board/Local

Planning Appeal Tribunal, and the Ontario Environmental Assessment Board. He regularly assists with negotiating settlements and wording agreements, to avoid costly hearings and to reduce delays, in the land use approvals process.

## EXPERIENCE:

Architectural acoustics involving the interaction of sound and architectural elements within a space to obtain the desired acoustical environment. This involves control of reverberation, ambient sound level, location of sound absorbing and sound reflecting surfaces as well as isolation of sound to and from adjacent spaces. Representative projects are: Niagara Convention Centre; Durham Consolidated Courthouse; Brampton Consolidated Courthouse; Upper Canada College Expansion, Toronto; Toronto Stock Exchange Renovations (The Design Exchange); Sunnybrook Health Science Centre Expansion and Renovation, Toronto; Metro Convention Centre Expansion, Toronto; Canary Wharf (DS5), London; Sudbury Regional Hospital; and GTAA Infield Development, Mississauga.

Environmental noise and vibration studies to determine impact of ground and air transportation and stationary sources of sound on adjacent land use, both existing and proposed, as well as selection and analysis of noise mitigation measures, including sound barriers, architectural elements, and operational techniques. Projects are prepared for private and government sectors, involving residential, industrial and commercial development. Representative projects include: Walker Brothers Quarry, Thorold; Keele Valley Landfill Vertical Expansion, Maple; Canadian National Railway Lands Redevelopment, Toronto; The Woodbridge Expansion Area, Vaughan; Rimply Manufacturing Plant, Newmarket; Honda Canada Manufacturing Minivan Plant, Alliston; Sheppard Subway, Toronto; and Highway 11, Burk's Falls to Powassan.

Mechanical system noise and vibration analyses to control the impact of air-borne and structure-borne sound from mechanical equipment on adjacent spaces through the design of demising surfaces, as well as the control of noise generated and transmitted through HVAC systems. Representative projects include: the New Princess Margaret Hospital, Toronto; National Trade Centre, Toronto; IBM Facility for Software Development, Markham; Niagara College – Glendale Campus, Niagara Falls; The American School, Shanghai; Guelph General Hospital; and Xiamen Conference Centre, China.

## EDUCATION:

- **B.Eng.,** Mechanical Engineering, McMaster University, 1989
- Course on Noise Control in Land Use Planning, Ministry of the Environment and Climate Change, Toronto, 1989

## PROFESSIONAL AFFILIATION:

- Registered Professional Engineer, Professional Engineers of Ontario
- Designated Consulting Engineer, Professional Engineers of Ontario
- Registered Professional Engineer, with the Engineers and Geoscientists of British Columbia

## PUBLICATIONS & PRESENTATIONS:

- "A Technique for Comparing Alternative Transportation Corridor Alignments Based on Noise Impact", presented at Inter-Noise 92, Toronto, Ontario, July 1992.
- "Environmental Noise Aspects of Landfill Site Selection", Canadian Acoustics, Vol. 21, No. 3, September 1993.
- "Acoustical Challenge of Quarry Design", Canadian Acoustics, Vol. 22, No. 3, September 1994.
- "NPC-300 Environmental Noise Guideline – Stationary and Transportation Sources – Approval and Planning", Seminar for Municipalities, December 9, 2013 (co-presenter).
- "Environmental Acoustics in Land Use Planning", Seminar in Acoustics for the City of Mississauga, June 24-26, 2014 (co-presenter).
- "Environmental Acoustics in Land Use Planning", Seminar in Acoustics for the City of London, July 9-11, 2014 (co-presenter).
- "Workshop: Noise and Vibration for New Development in Proximity to Railway Operations", Prepared for the FCM-RAC Proximity Steering Committee, June 26, 2015 (co-presenter).
- "Environmental Acoustics in Land Use Planning", Seminar in Acoustics for the City of Hamilton, January 23-25, 2018 (co-presenter).
- "Environmental Acoustics in Land Use Planning", Seminar in Acoustics for the City of London, March 23-25, 2021 (co-presenter).